US005910988A

United States Patent [19]

Ballard

[11] **Patent Number: 5,910,988**

[45] **Date of Patent: Jun. 8, 1999**

[54] **REMOTE IMAGE CAPTURE WITH CENTRALIZED PROCESSING AND STORAGE**

[75] Inventor: **Claudio R. Ballard**, Lloyd Harbor, N.Y.

[73] Assignee: **CSP Holdings, Inc.**, Lloyd Harbor, N.Y.

[21] Appl. No.: **08/917,761**

[22] Filed: **Aug. 27, 1997**

[51] **Int. Cl.**[6] **H04L 9/00**

[52] **U.S. Cl.** **380/24**

[58] **Field of Search** 380/25, 24

[56] **References Cited**

U.S. PATENT DOCUMENTS

4,201,978	5/1980	Nally	340/146.3
4,264,808	4/1981	Owens et al.	235/379
4,326,258	4/1982	de la Guardia	364/515
4,417,136	11/1983	Rushby et al.	235/379
4,457,015	6/1984	Nally et al.	382/45
4,500,750	2/1985	Elander et al.	380/26
4,523,330	6/1985	Cain	382/7
4,555,617	11/1985	Brooks et al.	235/379
4,578,530	3/1986	Zeidler	380/26
4,602,936	7/1986	Green et al.	382/140
4,680,803	7/1987	Dilella	382/9
4,694,147	9/1987	Amemiya et al.	235/379
4,747,058	5/1988	Ho	364/478
4,750,201	6/1988	Hodgson et al.	379/144
4,843,220	6/1989	Haun	235/380
4,888,812	12/1989	Dinan et al.	382/7
4,912,762	3/1990	Lee et al.	380/24
4,926,325	5/1990	Benton et al.	364/408
4,960,981	10/1990	Benton et al.	235/379
5,091,968	2/1992	Higgins et al.	382/30
5,122,950	6/1992	Benton et al.	364/408
5,144,115	9/1992	Yoshida	235/379
5,159,548	10/1992	Caslavka	364/408
5,173,594	12/1992	McClure	235/380
5,175,682	12/1992	Higashiyama et al.	364/408
5,187,750	2/1993	Behera	382/7
5,204,811	4/1993	Bednar et al.	364/406
5,220,501	6/1993	Lawlor et al.	364/408
5,237,158	8/1993	Kern et al.	235/379
5,274,567	12/1993	Kallin et al.	364/478
5,283,829	2/1994	Anderson	380/24
5,321,238	6/1994	Kamata et al.	235/379
5,321,751	6/1994	Ray et al.	380/23
5,345,090	9/1994	Hludzinski	250/566
5,434,928	7/1995	Wagner et al.	382/187
5,436,970	7/1995	Ray et al.	380/23
5,444,794	8/1995	Uhland, Sr.	382/137
5,457,747	10/1995	Drexler et al.	380/24
5,479,510	12/1995	Olsen et al.	380/24
5,506,691	4/1996	Bednar et al.	358/402
5,544,043	8/1996	Miki et al.	364/406

(List continued on next page.)

Primary Examiner—Salvatore Cangialosi

Attorney, Agent, or Firm—McGuire, Woods, Battle & Boothe LLP

[57] **ABSTRACT**

A system for remote data acquisition and centralized processing and storage is disclosed called the DataTreasury™ System. The DataTreasury™ System provides comprehensive support for the processing of documents and electronic data associated with different applications including sale, business, banking and general consumer transactions. The system retrieves transaction data at one or more remote Locations, encrypts the data, transmits the encrypted data to a central location, transforms the data to a usable form, performs identification verification using signature data and biometric data, generates informative reports from the data and transmits the informative reports to the remote location (s). The DataTreasury™ System has many advantageous features which work together to provide high performance, security, reliability, fault tolerance and low cost. First, the network architecture facilitates secure communication between the remote location(s) and the central processing facility. A dynamic address assignment algorithm performs load balancing among the system's servers for faster performance and higher utilization. Finally, a partitioning scheme improves the error correction process.

50 Claims, 10 Drawing Sheets

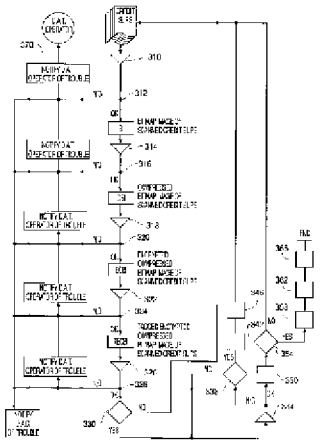

U.S. PATENT DOCUMENTS

5,590,038	12/1996	Pitroda	395/241
5,602,933	2/1997	Blackwell et al.	382/116
5,604,640	2/1997	Zipf et al.	359/803
5,613,001	3/1997	Bakhoum	380/4
5,647,017	7/1997	Smithies et al.	382/119
5,657,389	8/1997	Houvener	380/23
5,657,396	8/1997	Rudolph et al.	382/190
5,673,333	9/1997	Johnston	382/137
5,751,842	5/1998	Riach et al.	382/137
5,754,673	5/1998	Brooks et al.	382/112
5,781,654	7/1998	Carney	382/137
5,784,503	7/1998	Bleecker, III et al.	382/306
5,787,403	7/1998	Randle	705/43

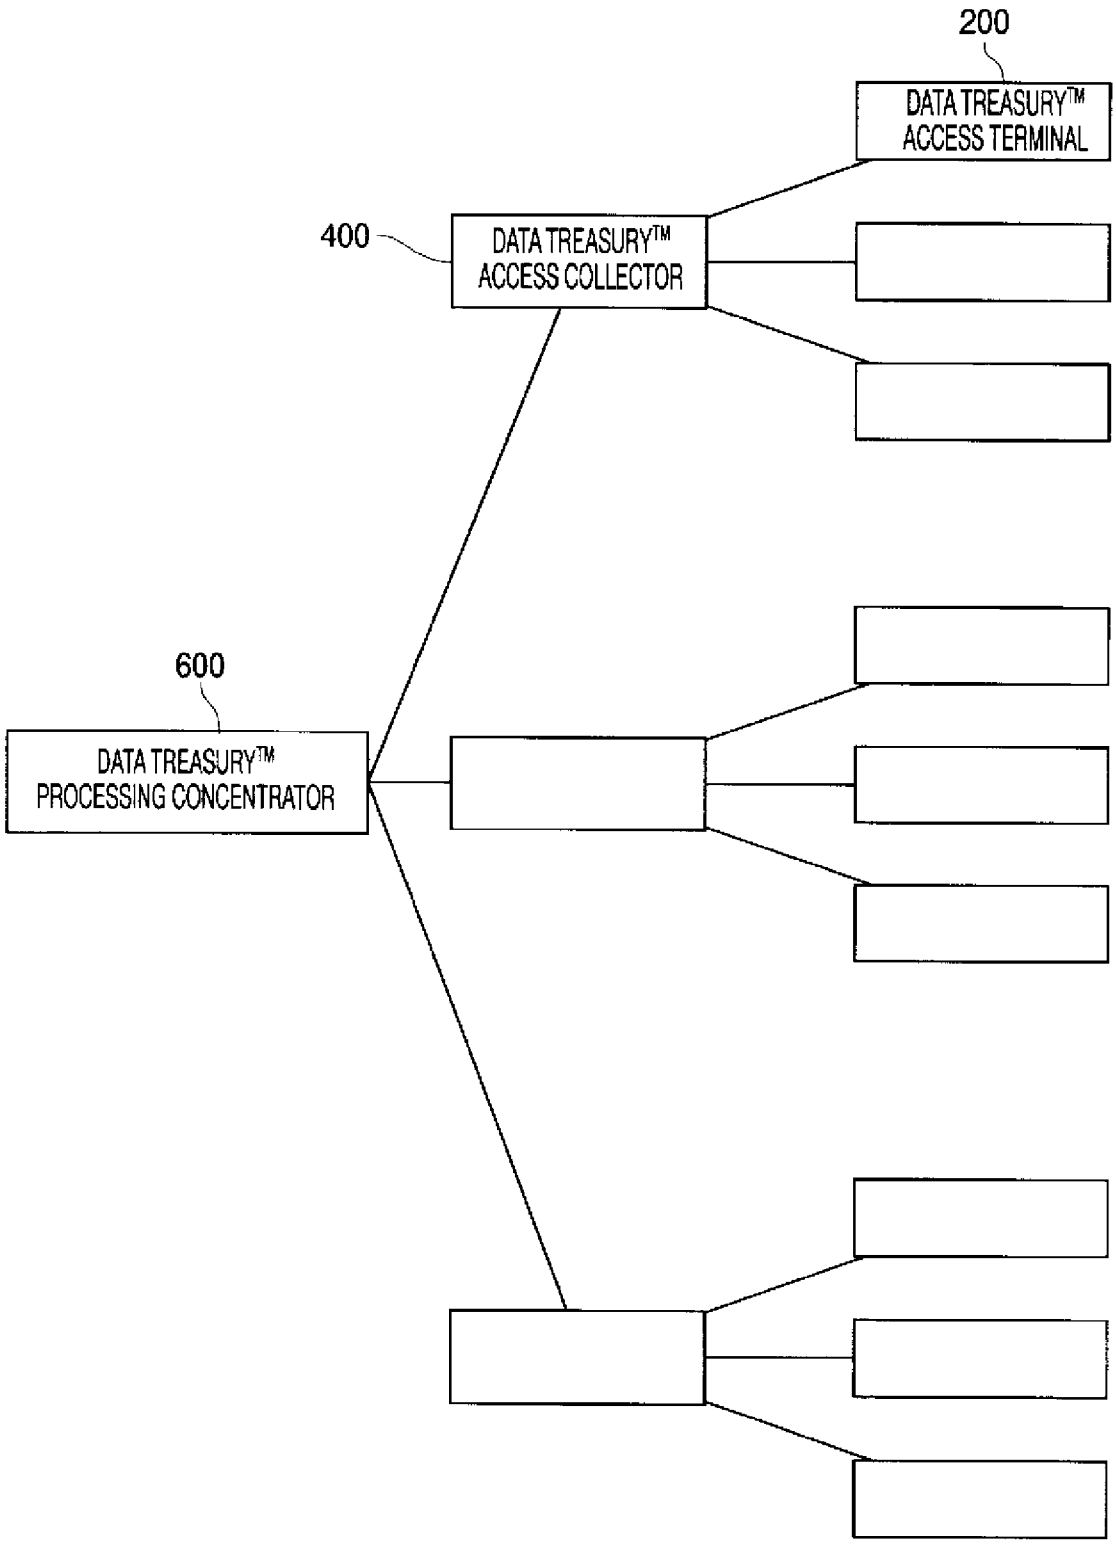
200
DATA TREASURY™ ACCESS TERMINAL
400
DATA TREASURY™ ACCESS COLLECTOR
600
DATA TREASURY™ PROCESSING CONCENTRATOR

FIG. 1

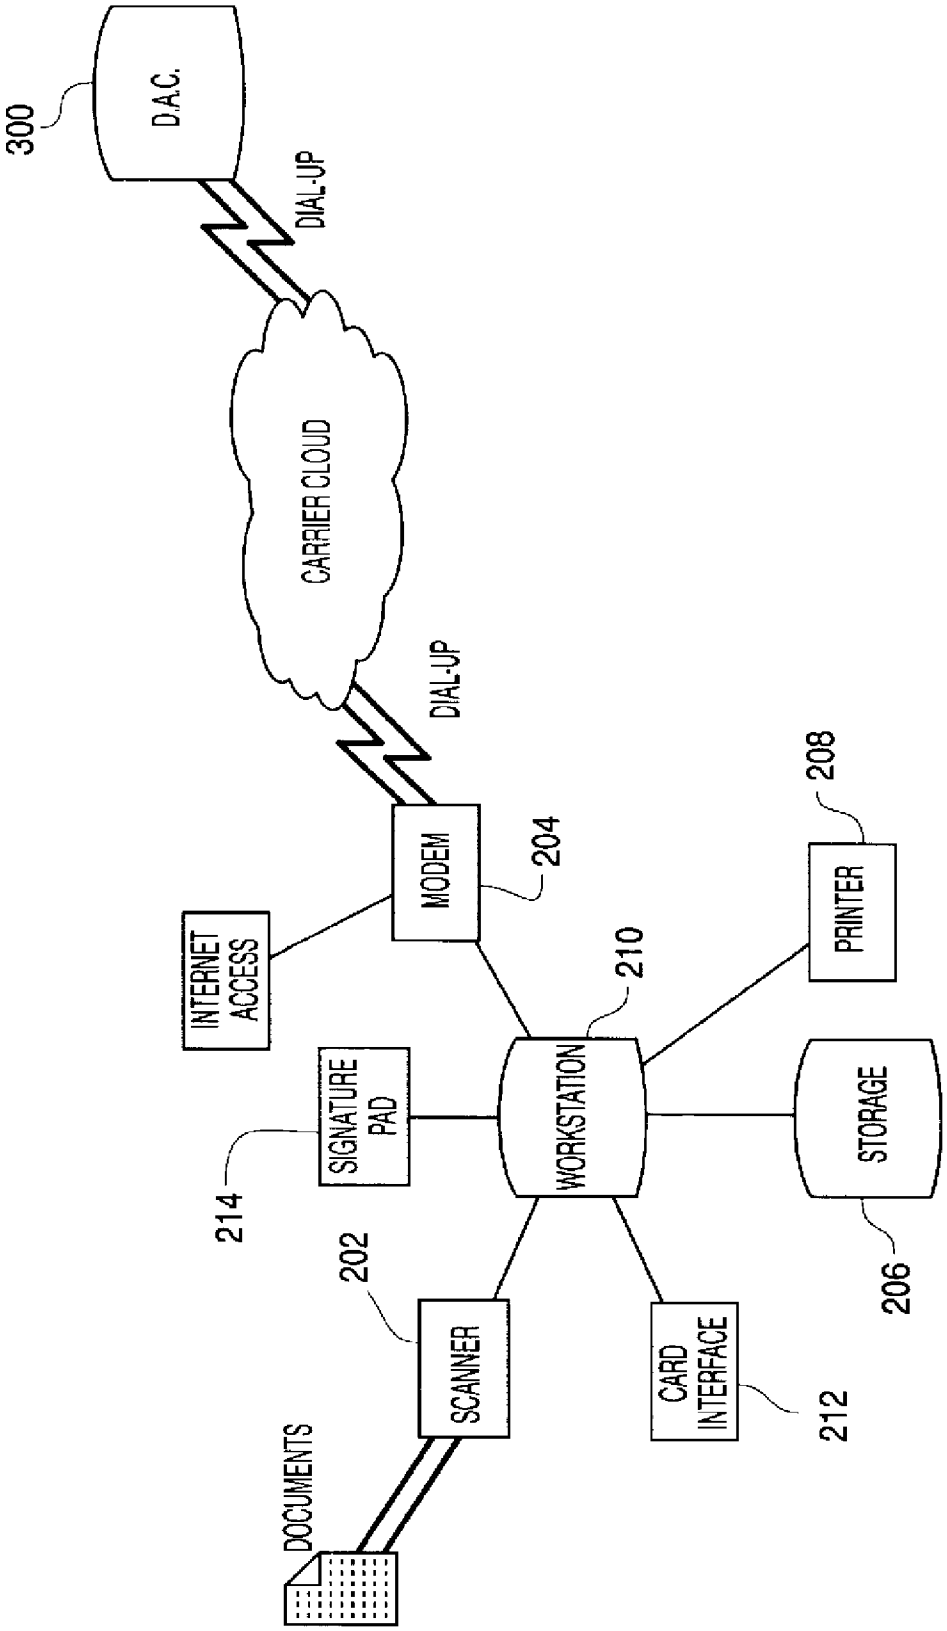
300
D.A.C.
DIAL-UP
CARRIER CLOUD
DIAL-UP
MODEM
204
INTERNET ACCESS
208
PRINTER
210
WORKSTATION
SIGNATURE PAD
214
STORAGE
206
202
SCANNER
CARD INTERFACE
212
DOCUMENTS

FIG. 2

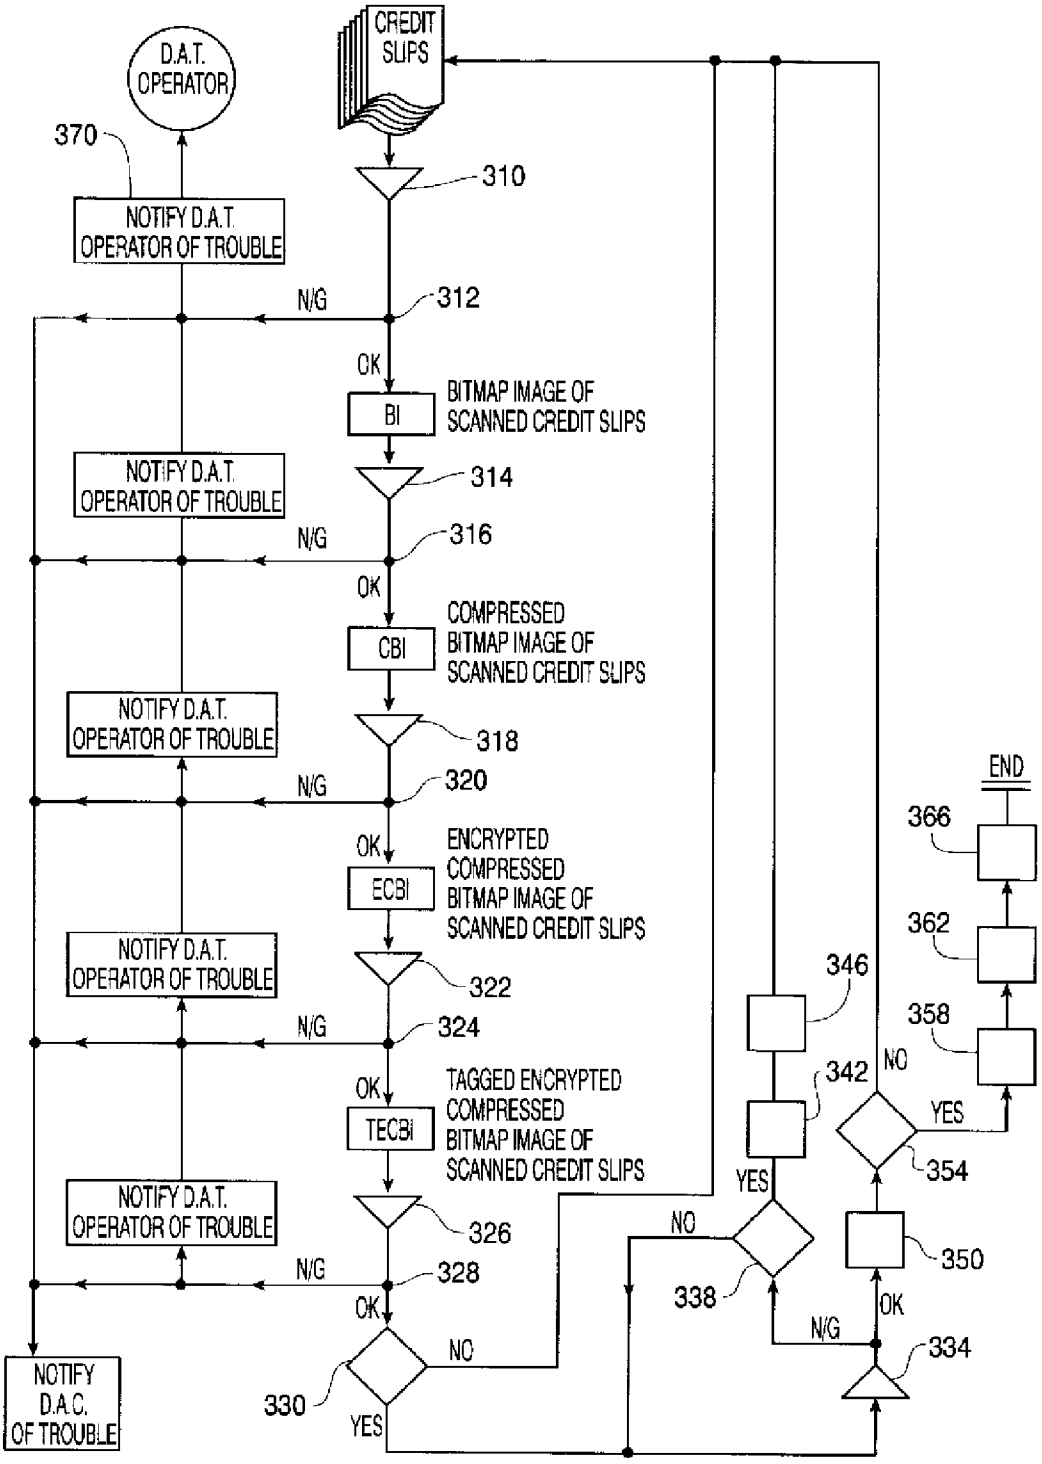
CREDIT SLIPS
D.A.T. OPERATOR
370
NOTIFY D.A.T. OPERATOR OF TROUBLE
310
N/G
312
OK
BI
BITMAP IMAGE OF SCANNED CREDIT SLIPS
NOTIFY D.A.T. OPERATOR OF TROUBLE
314
N/G
316
OK
CBI
COMPRESSED BITMAP IMAGE OF SCANNED CREDIT SLIPS
NOTIFY D.A.T. OPERATOR OF TROUBLE
318
N/G
320
OK
ECBI
ENCRYPTED COMPRESSED BITMAP IMAGE OF SCANNED CREDIT SLIPS
NOTIFY D.A.T. OPERATOR OF TROUBLE
322
N/G
324
OK
TECBi
TAGGED ENCRYPTED COMPRESSED BITMAP IMAGE OF SCANNED CREDIT SLIPS
NOTIFY D.A.T. OPERATOR OF TROUBLE
326
N/G
328
OK
NO
330
YES
NOTIFY D.A.C. OF TROUBLE
346
342
NO
YES
354
YES
NO
338
N/G
OK
350
334
END
366
362
358

FIG. 3A

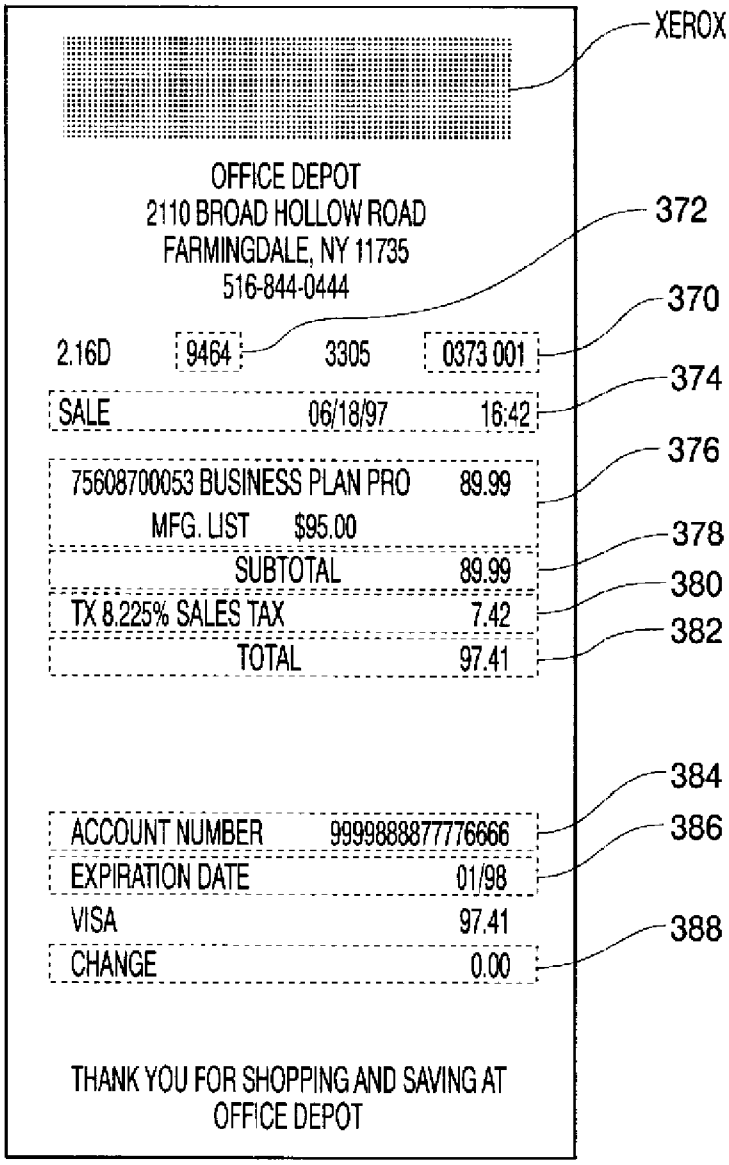

FIG. 3B

DTC000006

D 066709

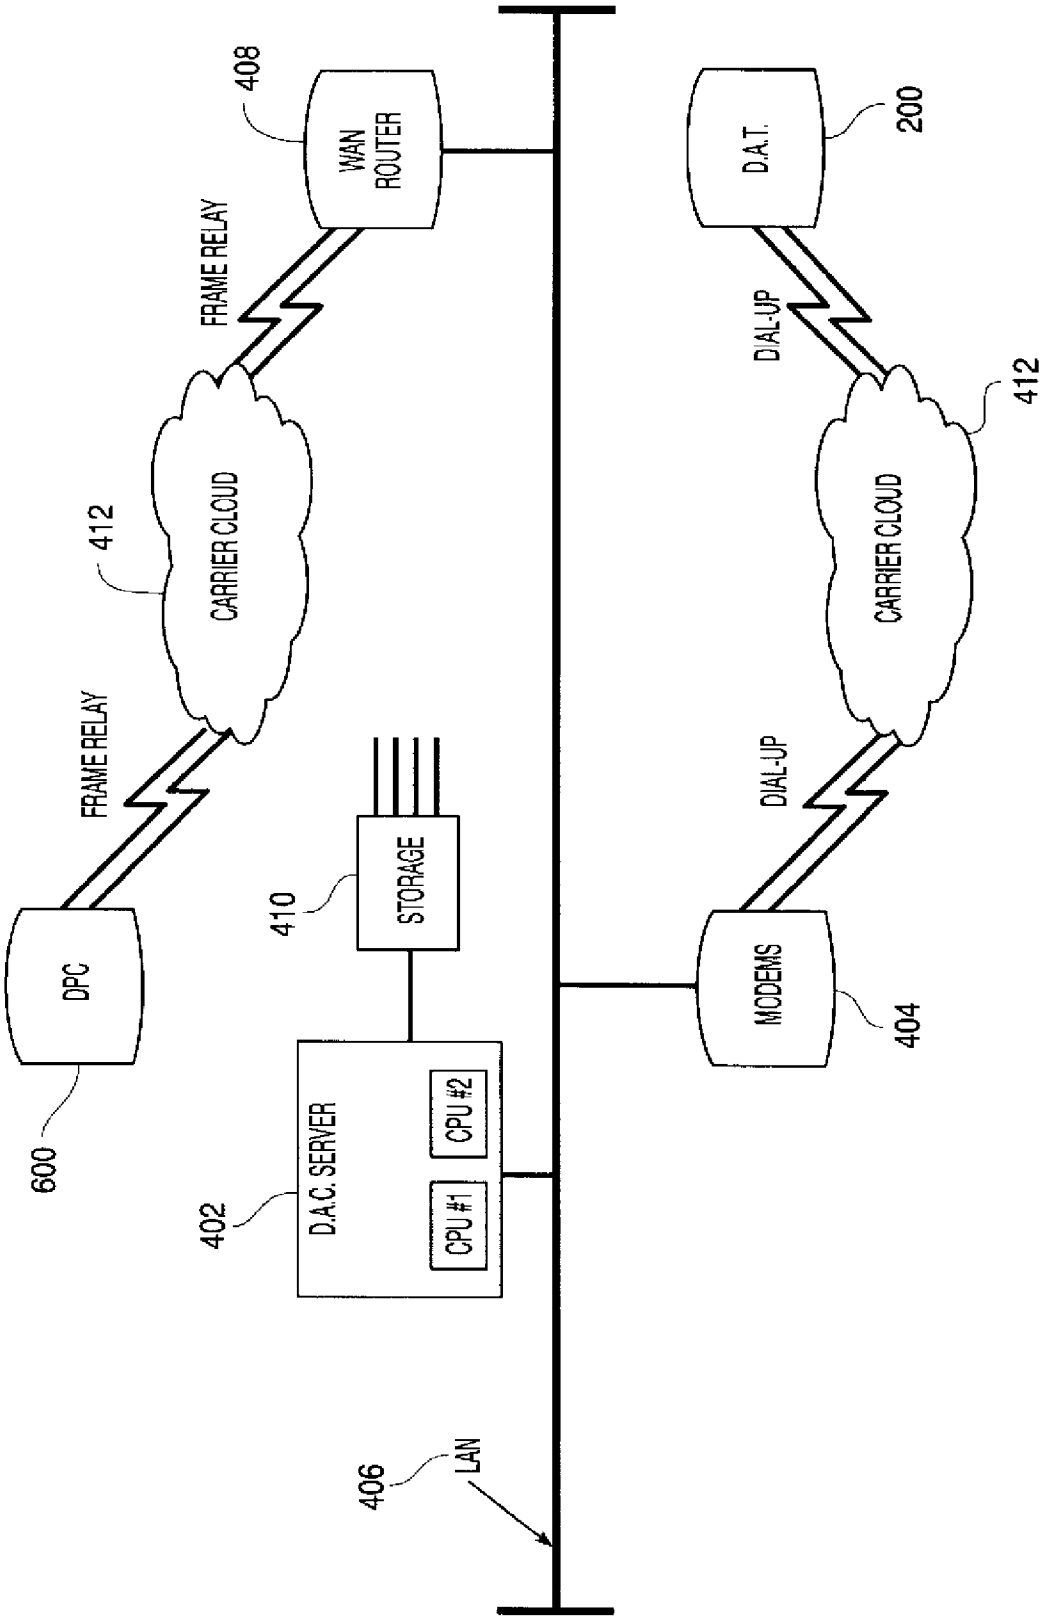

FIG. 4

DTC000007

D 066710

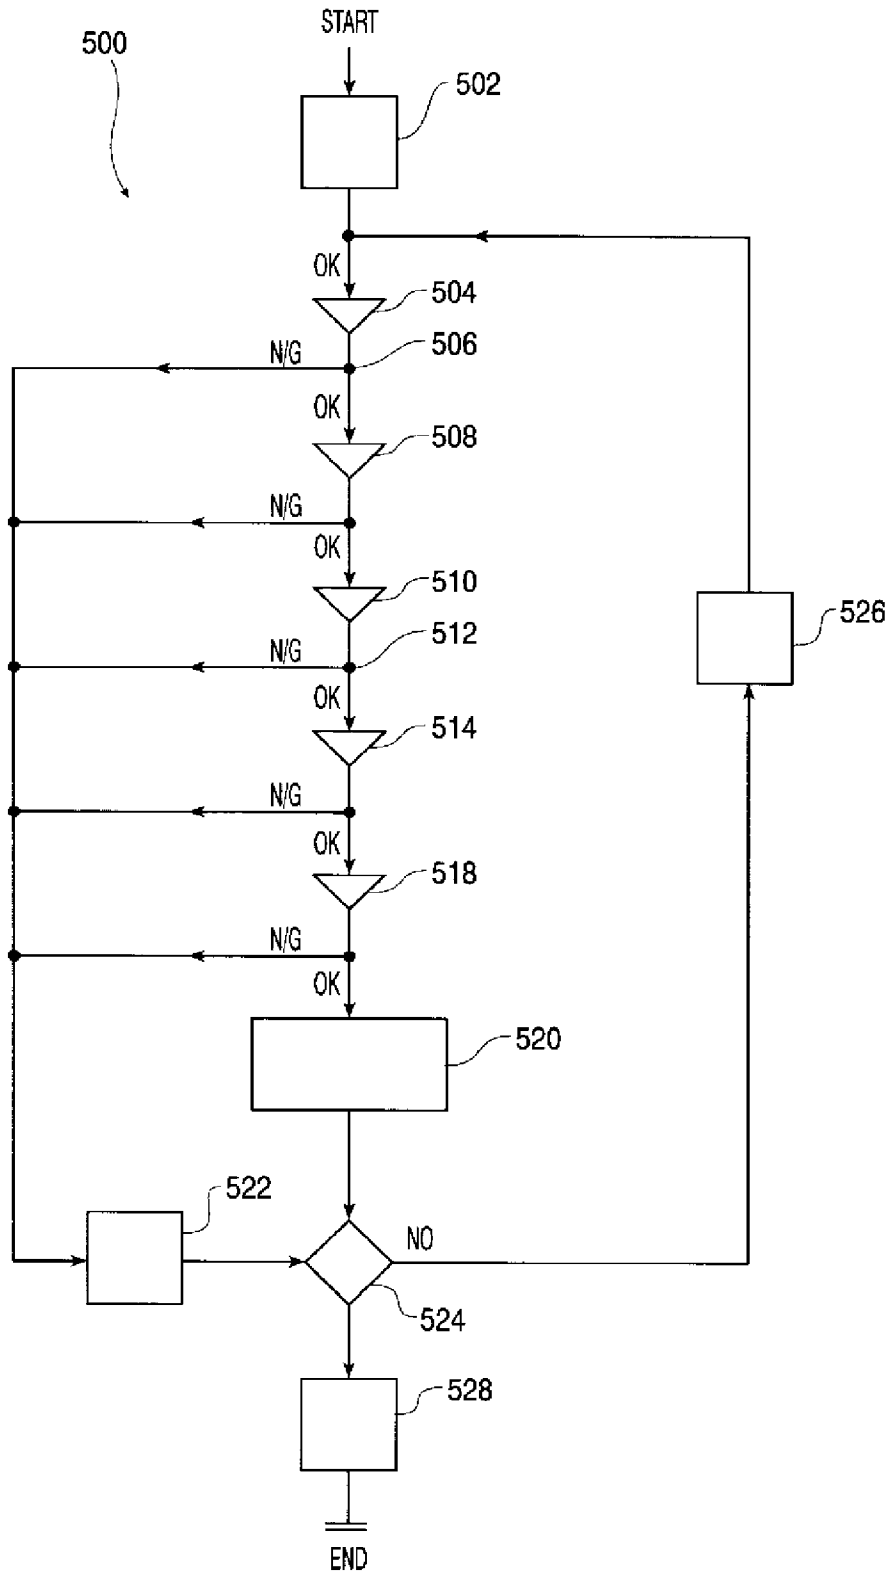
500
START
502
OK
504
N/G
506
OK
508
N/G
OK
510
N/G
512
OK
514
N/G
OK
518
N/G
OK
520
522
NO
524
526
528
END

FIG. 5

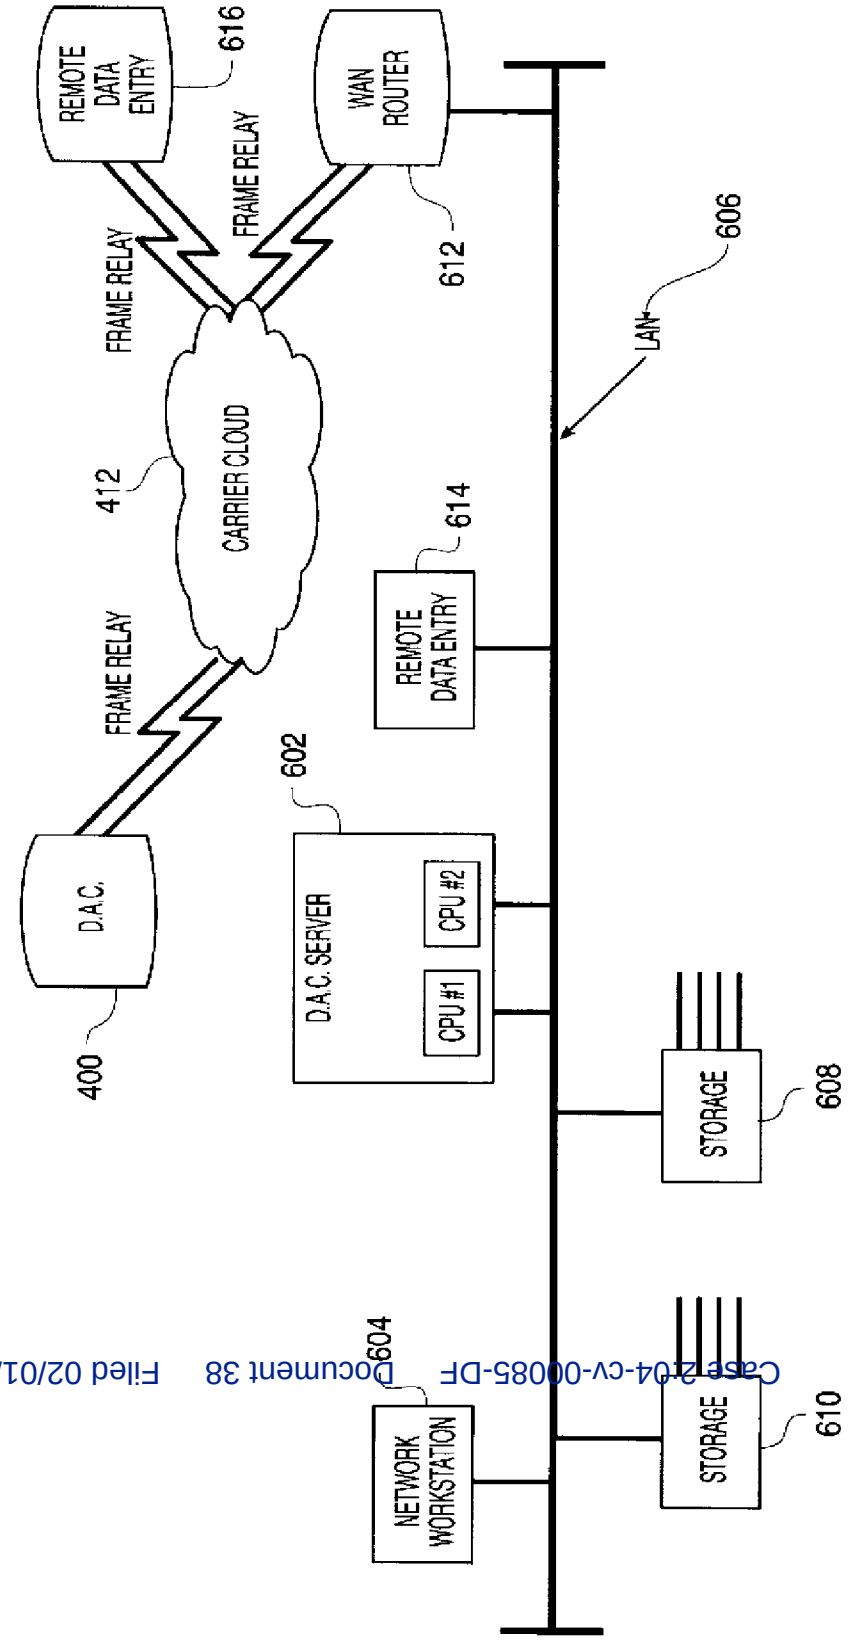

FIG. 6

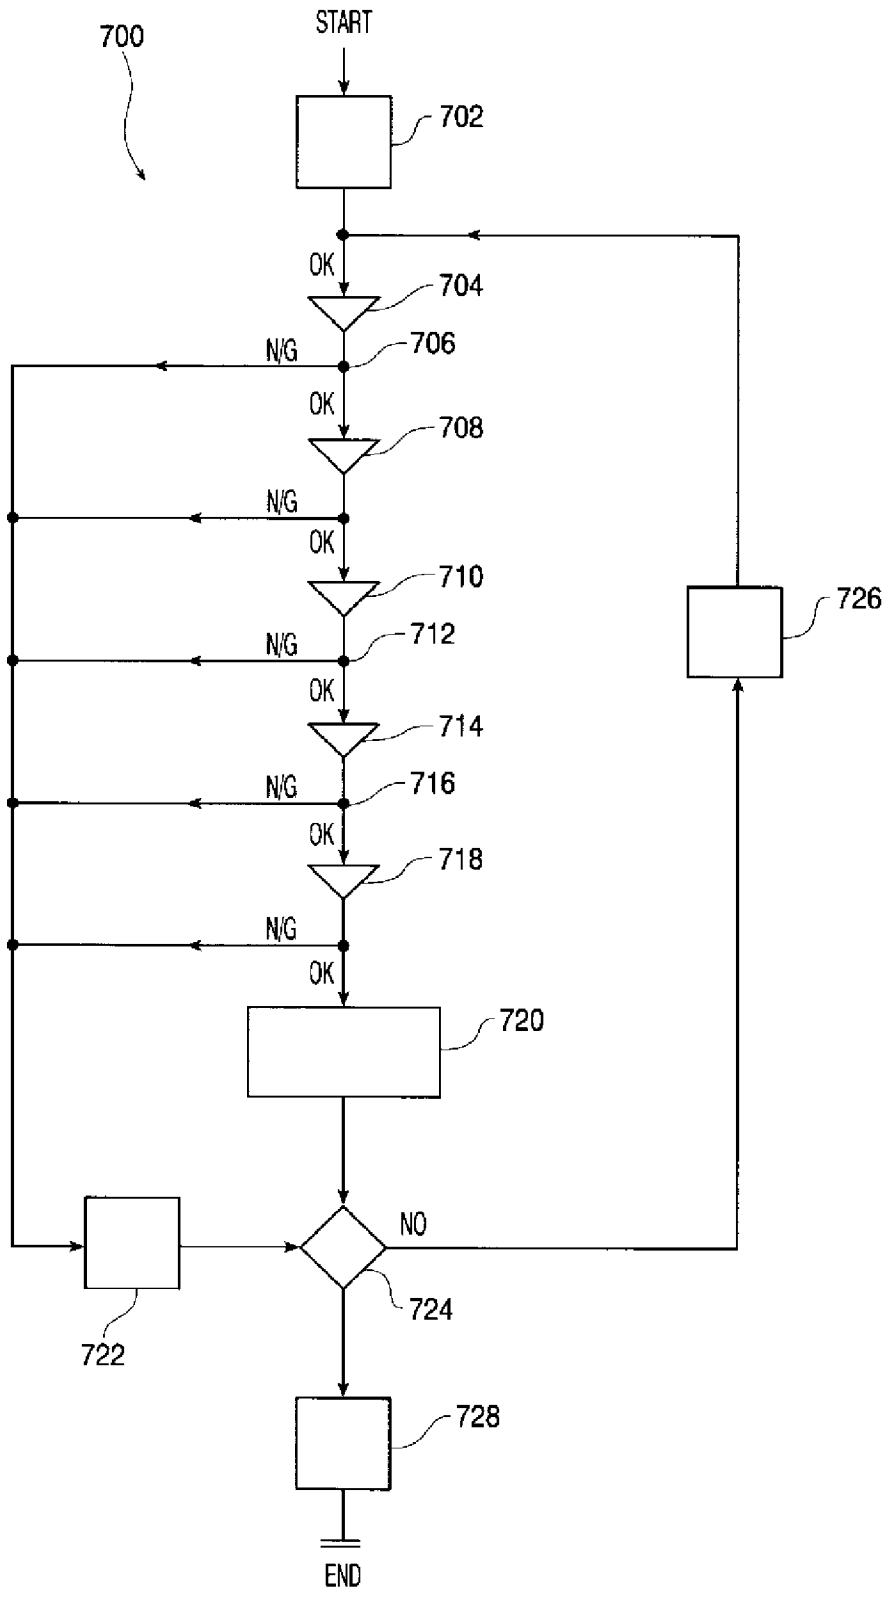
700
START
702
OK
704
N/G
706
OK
708
N/G
OK
710
N/G
712
OK
714
N/G
716
OK
718
N/G
OK
720
726
NO
724
722
728
END

FIG. 7

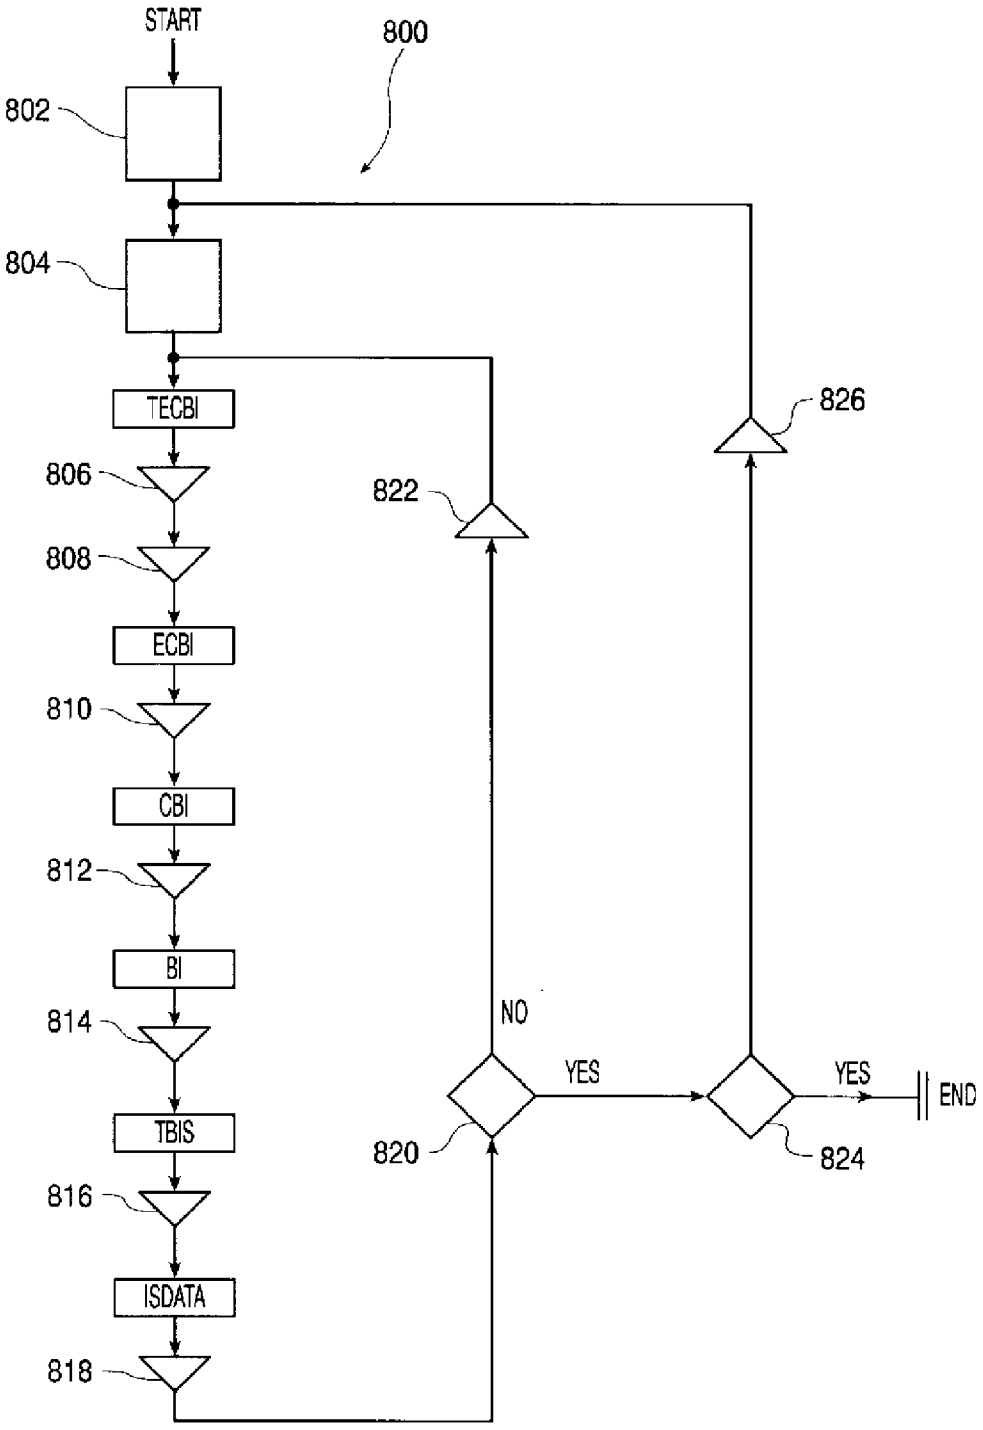
START
800
802
804
TECBI
806
808
ECBI
810
CBI
812
BI
814
TBIS
816
ISDATA
818
822
826
NO
YES
YES
END
820
824

FIG. 8

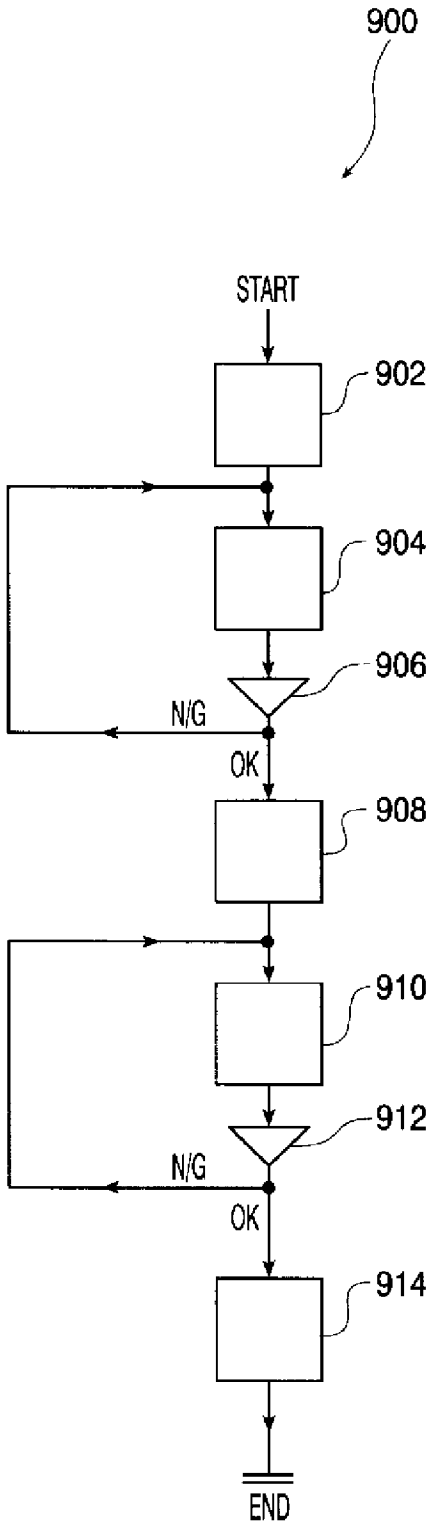

FIG. 9

REMOTE IMAGE CAPTURE WITH CENTRALIZED PROCESSING AND STORAGE

FIELD OF THE INVENTION

This invention relates generally to the automated processing of documents and electronic data from different applications including sale, business, banking and general consumer transactions. More particularly, it pertains to an automated system to retrieve transaction data at remote locations, to encrypt the data, to transmit the encrypted data to a central location, to transform the data to a usable form, to generate informative reports from the data and to transmit the informative reports to the remote locations.

BACKGROUND

This invention involves the processing of documents and electronic data which are generated, for example, from sale, business and banking transactions including credit card transactions, smart card transactions, automated teller machine (ATM) transactions, consumer purchases, business forms, W2 forms, birth certificates, deeds and insurance documents.

The enormous number of paper and electronic records generated from documents and electronic data from sale, business and banking transactions contain valuable information. First, these paper and electronic records contain information which can be used to verify the accuracy of the records maintained by consumers, merchants and bankers. For example, customers use paper receipts of sale and banking transactions to verify the information on the periodic statements which they receive from their bank or credit card institution. Merchants use paper receipts to record sale transactions for management of customer complaints. Taxpayers use paper receipts to record tax deductible contributions for use in their tax return preparation. Employees use paper receipts to record business expenses for preparation of business expense forms.

Paper and electronic records also contain information which can be used for market analysis. For example, manufacturers and retailers can determine consumer preferences in different regions as well as trends in consumer preferences from the information contained in paper and electronic records.

However, the maintenance and processing of paper and electronic records presents difficult challenges. First, paper receipts and documents could easily be lost, misplaced, stolen, damaged or destroyed. Further, the information contained in these paper and electronic records cannot be easily processed because it is scattered among individual records. For example, the market trend information contained in a group of sales records retained by merchants cannot easily be determined since this information is scattered among the individual records. Likewise, the tax information contained in a group of paper receipts of sales transactions retained by consumers cannot easily be processed.

Previous approaches have been proposed to meet the challenges associated with the maintenance and processing of paper and electronic records. For example, data archive service companies store the information from paper receipts and documents acquired from their customers on microfilm or compact disc read only memory (CD-ROM) at a central facility. Customers typically deliver the paper receipts and documents to the central facility. For sensitive documents which cannot leave the customer site, some data archive service companies perform data acquisition and transfer to magnetic tapes at the customer site and deliver the tapes to the central facility.

The approach offered by these data archive service companies have disadvantages. First, the approach is costly and has poor performance because it requires an expensive, time consuming physical transportation of paper receipts or magnetic tapes from the customer site to the central facility. Further, the approach is not reliable as information can be lost or damaged during physical transportation. The approach also has limited capability as it does not process electronic records along with the paper receipts within a single system.

Other approaches have focused on the elimination of paper receipts and documents. U.S. Pat. No. 5,590,038 discloses a universal electronic transaction card (UET card) or smart card which stores transaction information on a memory embedded on the card as a substitute for a paper receipt. Similarly, U.S. Pat. No. 5,479,510 discloses a method of electronically transmitting and storing purchaser information at the time of purchase which is read at a later time to ensure that the purchased goods or services are delivered to the correct person.

While these approaches avoid the problems associated with paper receipts, they have other disadvantages. First, these approaches do not offer independent verification of the accuracy of the records maintained by consumers, merchants and bankers with a third party recipient of the transaction data. For example, if a UET card is lost, stolen, damaged or deliberately altered by an unscrupulous holder after recording sale or banking transactions, these approaches would not be able to verify the remaining records which are maintained by the other parties to the transactions.

Next, these approaches do not have the ability to process both paper and electronic records of transactions within a single, comprehensive system. Accordingly, they do not address the task of processing the enormous number of paper receipts which have been generated from sales and banking transactions. The absence of the ability to process both paper and electronic records of these approaches is a significant limitation as paper receipts and documents will continue to be generated for the foreseeable future because of concerns over the reliability and security of electronic transactions and the familiarity of consumers and merchants with paper receipts.

These approaches also have a security deficiency as they do not offer signature verification which is typically used on credit card purchases to avoid theft and fraud. For example, a thief could misappropriate money from a UET card holder after obtaining by force, manipulation or theft the user's personal identification number (PIN). Similarly, it is not uncommon for criminals to acquire credit cards in victims' names and make unlawful charges after obtaining the victim's social security number. This becomes a greater concern as that type of personal information becomes available, e.g., on the internet. Also, the signature verification performed manually by merchants for credit card purchases frequently misses forged signatures.

Even if smart cards or UET cards had the ability to store signature and other biometric data within the card for verification, the system would still have disadvantages. First, the stored biometric data on the card could be altered by a card thief to defeat the security measure. Similarly, the biometric data could be corrupted if the card is damaged. Finally, the security measure would be costly at it would require an expensive biometric comparison feature either on each card or on equipment at each merchant site.

Additional biometric verification systems including signature verification systems have been proposed to address the security problem. For example, U.S. Pat. No. 5,657,393 discloses a method and apparatus for verification of handwritten signatures involving the extraction and comparison of signature characteristics including the length and angle of select component lines. In addition, U.S. Pat. No. 5,602,933 discloses a method and apparatus for the verification of remotely acquired data with corresponding data stored at a central facility.

However, none of these verification systems offer general support for transaction initiation, remote paper and electronic data acquisition, data encryption, data communication, data archival, data retrieval, data mining, manipulation and analytic services. Accordingly, there is a need for a single system which offers comprehensive support for the tasks involved in the automated processing of documents, biometric and electronic data from sale, business, banking and general consumer transactions. Further, there is a need for a single comprehensive system having the reliability, performance, fault tolerance, capacity, cost and security to satisfy the requirements of the retail, business, banking and general consumer industries.

SUMMARY OF THE INVENTION

The invention provides an automated, reliable, high performance, fault tolerant, and low cost system with maximal security and availability to process electronic and paper transactions, and has been named the DataTreasury™ System.

It is an object of the present invention to provide a system for central management, storage and verification of remotely captured electronic and paper transactions from credit cards, smart cards, debit cards, documents and receipts involving sales, business, banking and general purpose consumer applications comprising:

- at least one remote data access subsystem for capturing and sending electronic and paper transaction data;
- at least one data collecting subsystem for collecting and sending the electronic and paper transaction data comprising a first data management subsystem for managing the collecting and sending of the transaction data;
- at least one central data processing subsystem for processing, sending and storing the electronic and paper transaction data comprising a second data management subsystem for managing the processing, sending and storing of the transaction data; and
- at least one communication network for the transmission of the transaction data within and between said at least one data access subsystem and said at least one data processing subsystem.

The DataTreasury™ System processes paper and/or electronic receipts such as credit card receipts, Automated Teller Machine (ATM) receipts, business expense receipts and sales receipts and automatically generates reports such as credit card statements, bank statements, tax reports for tax return preparation, market analyses, and the like.

It is a further object of the DataTreasury™ System to retrieve both paper and electronic transactions at remote locations.

It is a further object of the DataTreasury™ System to employ a scanner and a data entry terminal at a customer site to retrieve data from paper transactions and to enable additions or modifications to the scanned information respectively.

It is a further object of the DataTreasury™ System to provide an input device for retrieving transaction data from the memory of smart cards for independent verification of the records maintained by consumers, merchants and bankers to prevent the loss of data from the loss, theft, damage or deliberate alteration of the smart card.

It is a further object of the DataTreasury™ System to retrieve and process transaction data from DataTreasury™ System anonymous smart cards which are identified by an account number and password. Since DataTreasury™ System anonymous smart card transactions can be identified without the customer's name, a customer can add money to the DataTreasury™ System anonymous smart card and make expenditures with the card with the same degree of privacy as cash acquisitions and expenditures.

It is a further object of the DataTreasury™ System to retrieve customer billing data from employee time documents and to generate customer billing statements from the billing data.

It is a further object of the DataTreasury™ System to initiate electronic transactions including transactions on the internet and to provide identification verification by capturing and comparing signature and biometric data.

It is a further object of the DataTreasury™ System of the invention to process electronic and paper transactions with a tiered architecture comprised of DataTreasury™ System Access Terminals (DATs), DataTreasury™ System Access Collectors (DACS) and DataTreasury™ System Processing Concentrators (DPCs).

BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects and features of the invention will be more clearly understood from the following detailed description along with the accompanying drawing figures, wherein:

FIG. **1** is a block diagram showing the three major operational elements of the invention: the DataTreasury™ System Access Terminal (DAT), the DataTreasury™ System Access Collector (DAC) and the DataTreasury™ System Processing Concentrator (DPC);

FIG. **2** is a block diagram of the DAT architecture;

FIG. **3***a* is a flow chart describing image capture by a DAT;

FIG. **3***b* displays a sample paper receipt which is processed by the DAT;

FIG. **4** is a block diagram of the DAC architecture;

FIG. **5** is a flow chart describing the polling of the DATs by a DAC;

FIG. **6** is a block diagram of the DPC architecture;

FIG. **7** is a flow chart describing the polling of the DACs by the DPC;

FIG. **8** is a flow chart describing the data processing performed by the DPC; and

FIG. **9** is a flow chart describing the data retrieval performed by the DPC.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

FIG. **1** shows the architecture of the DataTreasury™ System **100**. The DataTreasury™ System **100** has three operational elements: the DataTreasury™ System Access Terminal (DAT) **200** (the remote data access subsystem), the DataTreasury™ System Access Collector (DAC) **400** (the intermediate data collecting subsystem), and the DataTreasury™ System Processing Concentrator (DPC) **600** (the central data processing subsystem).

The DataTreasury™ System **100** architecture consists of three tiers. At the bottom tier, the DATs **200** retrieve data from the customer sites. At the next tier, the DACs **400** poll the DATs **200** to receive data which accumulates in the DATs **200**. At the top tier, the DPCs **600** poll the DACs **400** to receive data which accumulates in the DACs **400**. The DPCs **600** store the customer's data in a central location, generate informative reports from the data and transmit the informative reports to the customers at remote locations.

In the preferred embodiment, the DataTreasury™ System **100** complies with the Price Waterhouse SAS70 industry standard. Specifically, the DataTreasury™ System **100** meets the software development standard, the system deployment standard and the reliability standard specified by Price Waterhouse SAS70. By adhering to the Price Waterhouse SAS70 standard, the DataTreasury™ System **100** provides the security, availability and reliability required by mission critical financial applications of banks and stock brokerage companies.

As is known to persons of ordinary skill in the art, the DataTreasury™ System **100** could also use other software development standard, other system deployment standards and other reliability standards as long as adherence to these alternative standards provides the security, availability and reliability required by mission critical financial applications.

FIG. **2** shows a block diagram of the DAT **200** architecture. DATs **200** are located at customer sites. The DataTreasury™ System **100** customers include merchants, consumers and bankers. The DATs **200** act as the customer contact point to the suite of services provided by the DataTreasury™ System **100**. In the preferred embodiment, the DAT **200** is custom designed around a general purpose thin client Network Computer (NC) which runs SUN Microsystem's JAVA/OS operating system. The custom designed DAT **200** comprises a DAT scanner **202**, a DAT modem **204**, DAT digital storage **206**, a DAT controller **210** (workstation), a DAT card interface **212**, an optional DAT printer **208** and a signature pad **214**.

As is known to persons of ordinary skill in the art, the DAT **200** could also be custom designed around a general purpose network computer running other operating systems as long as the chosen operating system provides support for multiprocessing, memory management and dynamic linking required by the DataTreasury™ System **100**.

The DAT scanner **202** scans a paper receipt and generates a digital bitmap image representation called a Bitmap Image (BI) of the receipt. In the preferred embodiment, the DAT scanner **202** has the ability to support a full range of image resolution values which are commonly measured in Dots Per Inch (DPI). Next, the DAT scanner **202** has the ability to perform full duplex imaging. With full duplex imaging, a scanner simultaneous captures both the front and back of a paper document. The DAT scanner **202** can also support gray scale and full color imaging at any bit per pixel depth value. The DAT scanner **202** also supports the capture of handwritten signatures for identity verification.

In addition to scanning images and text, the DAT scanner **202** also scans DataGlyph™ elements, available from Xerox Corporation. As is known to persons of ordinary skill in the art, the Xerox DataGlyph™ Technology represents digital information with machine readable data which is encoded into many, tiny, individual glyph elements. Each glyph element consists of a 45 degree diagonal line which could be as short as 1/100th of an inch depending on the resolution of the scanning and printing devices. Each glyph element represents a binary 0 or 1 depending on whether it slopes downward to the left or the right respectively. Accordingly, DataGlyph™ elements can represent character strings as ASCII or EBCIDIC binary representations. Further, encryption methods, as known to persons of ordinary skill in the art encrypt the data represented by the DataGlyph™ Technology.

The use of glyph technology in the DataTreasury™ System **100** improves the accuracy, cost and performance of the system. Xerox DataGlyph™ Technology includes error correction codes which can be referenced to correct scanning errors or to correct damage to the document caused by ink spills or ordinary wear. DataGlyph™ Technology also leads to decreased system cost since the system will require less manual intervention for data entry and correction because of the improved accuracy associated with DataGlyph™ elements. Since DataGlyph™ elements represent a large amount of information in a small amount of space, the DAT scanner **100** will require a small amount of time to input a large amount of information.

The DAT card interface **212** and the DAT signature pad **214** along with the internet and telephone access through the DAT modem **204** enable the DataTreasury™ System **100** customer to initiate secure sale and banking transactions via the internet or telephone with the DAT **200** using a variety of cards including debit cards, smart cards and credit cards. After selecting a purchase or a banking transaction through a standard internet interface, the DataTreasury™ System **100** customer inserts or swipes the debit card, smart card or credit card into the DAT card interface **212**.

The DAT card interface **212** retrieves the identification information from the card for subsequent transmission to the destination of the internet transaction. Further, the DAT scanner **202** could capture a hand written signature from a document or the DAT signature pad **214** could capture an electronic signature written on it with a special pen. Similarly, these security featurs allow a credit card recipient to activate the card with a DAT **200** located at a merchant site. The security features would detect unauthorized use of debit cards, credit cards and smart cards resulting from their unlawful interception. Accordingly, the DataTreasury™ System's **100** security features offer a more secure alternative for internet and telephone transactions than the typical methods which only require transmission of a card account number and expiration date.

As is known to persons of ordinary skill in the art, the DATs **200** could also include additional devices for capturing other biometric data for additional security. These devices include facial scans, fingerprints, voice prints, iris scans, retina scans and hand geometry.

In addition to initiating sale and banking transactions, the DAT card interface **212** also reads sale and banking transactions initiated elsewhere from the memory of smart cards to enable subsequent storage and processing by the DataTreasury™ System. If a smart card is lost, stolen, damaged or deliberately altered by an unscrupulous holder after the DAT card interface **212** reads its transaction data, the DataTreasury™ System **100** can reproduce the transaction data for the customer. Accordingly, the DAT card interface **212** provides support for independent verification of the records maintained by consumers, merchants and bankers to prevent the loss of data from the loss, theft, damage or deliberate alteration of the smart card.

The DAT card interface **212** also supports the initiation and retrieval of sale and banking transactions with the DataTreasury™ System anonymous smart cards. In contrast to standard debit cards and credit cards, the DataTreasury™

System anonymous smart card does not identify the card's holder by name. Instead, the DataTreasury™ System anonymous smart card requires only an account number and a password. Since DataTreasury™ system anonymous smart card transactions can be identified without the customer's name, a DataTreasury™ System **100** customer can purchase a DataTreasury™ System anonymous smart card, add money to the card, make expenditures with the card and monitor the card's account with the same degree of privacy as cash acquisition, expenditure and management.

The DAT scanner **202**, the internet access, the signature pad **214** and other biometric data capture devices also support the remote capture of survey information and purchase orders. For example, the DAT scanner **202** captures surveys appearing on the back of checks at restaurants and bars. Similarly, the DAT scanner **202** could capture purchase orders from residences, enabling customers to make immediate purchases from their home of goods promoted through the mail. Accordingly, home marketing merchant could transmit sales in a more cost efficient and reliable manner by using the DAT scanner **202** instead of providing envelopes with prepaid postage to residences.

The DAT scanner **202** also captures receipts which are subsequently needed for tax return preparation or tax audits. Similarly, the DAT scanner **202** captures sales receipts from merchants, providing an off-site secure, reliable repository to guard against loss resulting from flooding, fire or other circumstances. This feature could also allow a merchant to automatically perform inventory in a reliable and cost-effective manner.

The DAT controller **210** performs processing tasks and Input/Output (I/O) tasks which are typically performed by a processor. The DAT controller **210** compresses, encrypts and tags the BI to form a Tagged Encrypted Compressed Bitmap Image (TECBI). The DAT controller **210** also manages the Input/Output (I/O). Specifically, the DAT controller **210** manages devices like the DAT scanner **202**, the DAT digital storage **206**, the optional DAT printer **208** and the DAT modem **204**.

The DAT digital storage **208** holds data such as the TECBI. The DAT modem **204** transmits data from the DAT **200** to the appropriate DAC **400** as instructed by the DAT controller **210**. Specifically, the DAT modem **204** transmits the TECBIs from the DAT digital storage **208** to the appropriate DAC **400**. In the preferred embodiment, the DAT modem **204** is a high speed modem with dial-up connectivity. The DAT digital storage **208** is sufficiently large to store the input data before transmission to a DAC **400**. The DAT digital storage **208** can be Random Access Memory (RAM) or a hard drive.

FIG. **3***a* is a flow chart **300** describing the operation of the DAT in detail. In step **310**, the DAT scanner **202** scans paper receipts into the DAT **200** provided by an operator. In step **312**, the DAT controller **210** determines whether the operation executed successfully. If the scanning is successful, the DAT scanner **202** produces a Bitmap Image (BI). If the scanning is unsuccessful, the DAT controller **210** notifies the operator of the trouble and prompts the operator for repair in step **370**.

If a BI is created, the DAT controller **210** executes a conventional image compression algorithm like the Tagged Image File Format (TIFF) program to compress the BI in step **314**. In step **316**, the DAT controller **210** determines whether the compression executed successfully. If the compression is successful, it produces a Compressed Bitmap Image (CBI). If the compression is unsuccessful, the DAT controller **210** notifies the operator of the trouble and prompts the operator for repair in step **370**.

If a CBI is created, the DAT controller **210** executes an encryption algorithm which is well known to an artisan of ordinary skill in the field to encrypt the CBI in step **318**. Encryption protects against unauthorized access during the subsequent transmission of the data which will be discussed below. In step **320**, the DAT controller **210** determines whether the encryption operation executed successfully. If the encryption is successful, it produces an Encrypted Compressed Bitmap Image (ECBI). If the encryption is unsuccessful, the DAT controller **210** notifies the operator of the trouble and prompts the operator for repair in step **370**.

If an ECBI is created, the DAT controller **210** tags the ECBI with a time stamp which includes the scanning time, an identification number to identify the merchant originating the scan and any additional useful information in step **322**. In step **324**, the DAT controller **210** determines whether the tagging operation executed successfully. If the tagging is successful, it produces a Tagged Encrypted Compressed Bitmap Image (TECBI). If the tagging is unsuccessful, the DAT controller **210** notifies the operator of the trouble and prompts the operator for repair in step **370**.

If a TECBI is created, the DAT controller **210** stores the TECBI in the DAT digital storage **208** in step **326**. In step **328**, the DAT controller **210** determines whether the storing operation executed successfully. If the storing operation is successful, the DAT digital storage **208** will contain the TECBI. If the storing operation is unsuccessful, the DAT controller **210** notifies the operator of the trouble and prompts the operator for repair in step **370**.

If the TECBI is properly stored in the DAT digital storage **208**, the DAT controller **210** determines whether all paper receipts have been scanned in step **330**. If all paper receipts have not been scanned, control returns to step **310** where the next paper receipt will be processed as discussed above. If all paper receipts have been scanned, the DAT controller **210** asks the operator to verify the number of scanned receipts in step **334**. If the number of scanned receipts as determined by the DAT controller **210** does not equal the number of scanned receipts as determined by the operator, the DAT controller **210** asks whether the operator desires to rescan all of the receipts in step **338**.

If the operator chooses to rescan all of the receipts in step **338**, the DAT controller **210** will delete all of the TECBIs associated with the batch from the DAT digital storage **208** in step **342**. After the operator prepares the batch of receipts for rescan in step **346**, control returns to step **310** where the first receipt in the batch will be processed as discussed above.

If the operator chooses not to rescan all of the receipts from the batch in step **338**, control returns to step **334** where the DAT controller **210** asks the operator to verify the number of scanned receipts as discussed above.

If the number of scanned receipts as determined by the DAT controller **210** equals the number of scanned receipts as determined by the operator, the DAT controller **210** prints a batch ticket on the DAT printer **206** in step **350**. The operator will attach this batch ticket to the batch of receipts which have been scanned. This batch ticket shall contain relevant session information such as scan time, number of receipts and an identification number for the data operator. If processing difficulties occur for a batch of receipts after the image capture of flowchart **300**, the batch ticket will enable them to be quickly located for rescanning with the DAT **200**.

In step **354**, the DAT controller **210** determines whether the scan session has completed. If the scan session has not

completed, control returns to step **310** where the first receipt in the next batch of the scan session will be processed as discussed above. If the scan session has completed, the DAT controller **210** selectively prints a session report on the DAT printer **206** in step **358**. The DAT controller **210** writes statistical information for the session to the DAT digital storage **208** in step **362**. In step **366**, the DAT controller **210** terminates the session.

FIG. **3***b* displays a sample paper receipt which is processed by the DAT **200** as described by the flowchart in FIG. **3***a*. The sample paper receipt involves a credit card transaction which has four participants:

A. The ISSUER: is an entity such as a bank or corporate financial institution such as GE Capital, GM or AT&T which provides the credit behind the credit card and issues the card to the consumer.

B. The PROCESSOR: executes the processing of an inbound credit card transaction by performing basic transaction validation that includes checking with the ISSUER database to ensure that the credit card has sufficient credit to allow approval of the transaction.

C. The ACQUIRER: specializes in the marketing, installation and support of Point Of Sale (POS) credit card terminals. The acquirer, like the DAC **400** in the DataTreasury™ System **100** acts as an electronic collection point for the initial credit card transaction as the card is inserted into the POS terminal. After acquisition, the acquirer passes the transaction to the PROCESSOR.

D. The MERCHANT: inserts a credit card into a POS terminal and enters the amount of the transaction to initiate the credit card transaction.

In the preferred embodiment, the DAT **200** reads the following information from the sample paper receipt shown in FIG. **3**i band stores the information in the format described below.

CUSTOMER_ID **370**: This field is a 7 position HEX numeric value. This field uniquely identifies the customer using the terminal. In this sample, this field would identify the credit card merchant.

TERMINAL_ID **372**: This field is a 6 position decimal numeric value. This field uniquely identifies the credit card terminal which is used to print the credit card receipt.

TRANSACTION_DATE **374**: This field contains the date and time of the credit card transaction.

TRANSACTION_LINE_ITEM **376**: This field is a variable length character string. The first three positions represent a right justified numeric field with leading zeros indicating the full length of this field. This field contains all data pertaining to the purchased item including the item's price. The DAT **200** will store a TRANSACTION_LINE_ITEM field for each transaction line item on the receipt. This field is optional since not all credit card transactions will have line items.

TRANSACTION_SUBTOTAL **378**: This field is a double precision floating point number. This field indicates the subtotal of the TRANSACTION_LINE_ITEMs.

TRANSACTION_SALES_TAX **380**: This field is a double precision floating point number. This field contains the sales tax of the TRANSACTION_SUBTOTAL.

TRANSACTION_AMOUNT **382**: This field is a double precision floating point number. This field is the sum of the TRANSACTION_SUBTOTAL and TRANSACTION_SALES_TAX.

CREDIT_CARD_ACCT_NUM **384**: This field is a 12 position decimal value. This field identifies the credit card which was used to execute this transaction.

CREDIT_CARD_EXP_DATE **386**: This field identifies the expiration date of the credit card.

TRANSACTION_APPROVAL_CODE **388**: This field is a 6 position numeric value. This field indicates the approval code that was given for the particular transaction.

The DAT **200** also stores additional items which are not pictured in FIG. **3***b* as described below:

ISSUER_ID: This field is a 7 position decimal numeric value. This field identifies the credit card issuer.

ACQUIRER_ID: This field is a 7 position decimal numeric value. This field identifies the acquirer.

PROCESSOR_ID: This field is a 7 position decimal numeric value. This field identifies the processor.

TRANSACTION_LINE_ITEM_CNT: This field is a 3 position decimal numeric value. This field identifies the number of transaction line items on the receipt. A value of ZERO indicates the absence of any transaction line items on the receipt.

TRANSACTION_GRATUITY: This field is a double precision floating number. This field is optional because it will only appear on restaurant or bar receipts.

FINAL_TRANSACTION_AMOUNT: This field is a double precision floating number. This field is optional because it will only appear on restaurant and bar receipts. The field is the sum of the TRANSACTION_AMOUNT and TRANSACTION_GRATUITY.

The tag prepended to the ECBI in step **322** of the flowchart of FIG. **3***a* identifies the time and place of the document's origination. Specifically, the tag consists of the following fields:

DAT_TERMINAL_ID: This field is a 7 position hexadecimal numeric value. This field uniquely identifies the DAT **200** which is used by the customer.

DAT_SESSION_DATE: This field identifies the date and time of the DAT **200** session which generated the image of the document.

DAT_USER_ID: This field is a 4 position decimal numeric value. This field identifies the individual within the CUSTOMER's organization who initiated the DAT **200** session.

DATA_GLYPH_RESULT: This field is a variable length character string. The first four positions hold a right justified numeric position with leading zero which indicate the length of the field. The fifth position indicates the DataGlyph™ element status. A value of 0 indicates that the data glyph was NOT PRESENT on the receipt. A value of 1 indicates that the data glyph WAS PRESENT and contained no errors. A value of 2 indicates that the data glyph WAS PRESENT and had nominal errors. If the fifth position of this field has a value of 2, the remaining portion of the string identifies the erroneous field numbers. As subsequently described, the DPC **600** will reference this portion of the field to capture the erroneous data from the receipt with alternate methods. A value of 3 indicates that the data glyph WAS PRESENT WITH SEVERE ERRORS. In other words, a value of 3 indicates the DataGlyph™ element was badly damaged and unreadable.

The receipt shown in FIG. **3***b* can also contain a signature which can be captured by the DAT scanner **202**. A data glyph could identify the location of the signature on the receipt.

As is known to persons of ordinary skill in the art, the DataTreasury™ System **100** can also process receipts with alternate formats as long as the receipt contains the appropriate identification information such as the transaction amount, the customer, the DAT **200**, the transaction date, the transaction tax, the credit card number, the credit card expiration date, etc.

The DataTreasury™ System **100** partitions the paper receipt into image snippets as illustrated by the sample on FIG. **3***b*. Partitioning facilitates an improvement in the process to correct errors from the scanning operation. If an error occurred during scanning, the DataTreasury™ System **100** corrects the error using manual entry. With partitioning, the DataTreasury™ System **100** focuses the correction effort on only the image snippet having the error instead of correcting the entire document. The subsequently discussed schema of the DataTreasury™ System **100** database describes the implementation of the partitioning concept in detail.

The DACs **400** form the backbone of the tiered architecture shown in FIG. **1** and FIG. **4**. As shown in FIG. **1**, each DAC **400** supports a region containing a group of DATs **200**. Each DAC **400** polls the DATs **200** in its region and receives TECBIs which have accumulated in the DATs **200**. The DACs **400** are located at key central sites of maximum merchant density.

In the preferred embodiment, the DAC server **402** comprises stand-alone Digital Equipment Corporation (DEC) SMP Alpha 4100 2/566 servers which are connected on a common network running Windows NT. The DEC Alpha servers manage the collection and intermediate storage of images and data which are received from the DATs **200**.

As is known to persons of ordinary skill in the art, the DataTreasury™ System **100** could use any one of a number of different servers that are available from other computer vendors as long as the server meets the capacity, performance and reliability requirements of the system.

In the preferred embodiment, the DAC server **402** also comprises EMC **3300** SYMMETRIX CUBE Disk Storage Systems, which store the images and data collected and managed by the DEC Alpha servers. The DAC **400** architecture also uses a SYMMETRIX Remote Data Facility (SRDF), available from EMC, to enable multiple, physically separate data centers housing EMC Storage Systems to maintain redundant backups of each other across a Wide Area Network (WAN). Since SRDF performs the backup operations in the background, it does not affect the operational performance of the DataTreasury™ System **100**. The DAC server **402** also has secondary memory **410**. In the preferred embodiment, the secondary memory **410** is a small scale DLT jukebox.

The DAC Alpha servers of the DAC server **402** insert images and data received from the DATS **200** into a database which is stored on the disk storage systems using a data manipulation language as is well known to persons of ordinary skill in the art. In the preferred embodiment, the database is a relational database available from Oracle.

As is well known to persons of ordinary skill in the art, the DataTreasury™ System **100** could use any one of a number of different database models which are available from other vendors including the entity relationship model as long as the selected database meets the storage and access efficiency requirements of the system. See, e.g., Chapter 2 of Database System Concepts by Korth and Silberschatz.

The DAC **400** architecture uses a WEB based paradigm using an enhanced Domain Name Services (DNS), the Microsoft Component Object Model (DCOM), and Windows NT Application Program Interfaces (APIs) to facilitate communication and load balancing among the servers comprising the DAC server **402**. As is known to persons of ordinary skill in the art, DNS, which is also known as Bind, statically translates name requests to Internet Protocol 4 (IP4) addresses. In the DAC **400** architecture, an enhanced DNS dynamically assigns IP4 addresses to balance the load among the servers comprising the DAC server **402**.

In the preferred embodiment, the enhanced DNS is designed and implemented using objects from Microsoft DCOM. Using the DCOM objects, the enhanced DNS acquires real-time server load performance statistics on each server comprising the DAC server **402** from the Windows NT API at set intervals. Based on these load performance statistics, the enhanced DNS adjusts the mapping of name requests to IP4 addresses to direct data toward the servers which are more lightly loaded.

A large bank of modems **404** polls the DATs **200** at the customer sites within the DAC's **400** region. In the preferred embodiment, the bank of modems **404**, available as CISCO AS5200, is an aggregate **48** modem device with Local Area Network (LAN) **406** connectivity which permits the DAC servers **402** to dial the DATs **200** without requiring **48** separate modems and serial connections.

The DAC servers **402** and the bank of modems **404** are connected on a LAN **406**. In the preferred embodiment, the LAN uses a switched 100BaseT/10BaseT communication hardware layer protocol. As is known to persons of ordinary skill in the art, the 100BaseT/10BaseT protocol is based on the Ethernet model. Further, the numbers 100 and 10 refer to the communication link speed in megabits per second. In the preferred embodiment, the CISCO Catalyst 2900 Network Switch supports the LAN **406** connectivity between the devices connected to the LAN **406** including the DAC servers **402** and the bank of modems **404**.

As is known to persons of ordinary skill in the art, alternate LAN architectures could be used to facilitate communication among the devices of the LAN **406**. For example, the LAN **406** could use a hub architecture with a round robin allocation algorithm, a time division multiplexing algorithm or a statistical multiplexing algorithm.

A Wide Area Network (WAN) router **408** connects the LAN **406** to the WAN to facilitate communication between the DACs **400** and the DPCs **600**. In the preferred embodiment, the WAN router **408** is a CISCO 4700 WAN Router. The WAN router **408** uses frame relay connectivity to connect the DAC LAN **406** to the WAN. As is known to persons of ordinary skill in the art, alternate devices, such as the NORTEL Magellen Passport "50" Telecommunication Switch, could be used to facilitate communication between the DACs **400** and the DPCs **600** as long as the selected router meets the performance and quality communication requirements of the system.

As is known to persons of ordinary skill in the art, frame relay is an interface protocol for statistically multiplexed packet-switched data communications in which variable-sized packets (frames) are used that completely enclose the user packets which they transport. In contrast to dedicated point to point links that guarantee a specific data rate, frame relay communication provides bandwidth on-demand with a guaranteed minimum data rate. Frame relay communication also allows occasional short high data rate bursts according to network availability.

Each frame encloses one user packet and adds addressing and verification information. Frame relay data communication typically has transmission rates between 56 kilobytes per second (kb/s) and 1.544 megabytes per second (Mb/s). Frames may vary in length up to a design limit of approximately 1 kilobyte.

The Telco Carrier Cloud **412** is a communication network which receives the frames destined for the DPC **600** sent by the WAN router **408** from the DACs **400**. As is known to persons of ordinary skill in the art, carriers provide communication services at local central offices. These central offices contain networking facilities and equipment to inter-

connect telephone and data communications to other central offices within its own network and within networks of other carriers.

Since carriers share the component links of the interconnection network, data communication must be dynamically assigned to links in the network according to availability. Because of the dynamic nature of the data routing, the interconnection network is referred to as a carrier cloud of communication bandwidth.

All the DAC **400** equipment is on fully redundant on-line UPS power supplies to insure maximum power availability. Further, to minimize the time for trouble detection, trouble analysis and repair, all the DAC **400** equipment incorporates trouble detection and remote reporting/diagnostics as is known to an artisan of ordinary skill in the art.

FIG. **5** is a flow chart **500** describing the polling of the DATs **200** by a DAC **400** and the transmission of the TECBIs from the DATs **200** to the DAC **400**. In step **502**, the DAC server **402** reads the address of the first DAT **200** in its region for polling. In step **504**, a modem in the modem bank **404** dials the first DAT **200**. The DAC **400** determines whether the call to the DAT **200** was successful in step **506**. If the call to the first DAT **200** was unsuccessful, the DAC **400** will record the error condition in the session summary report and will report the error to the DPC **600** in step **522**.

If the call to the first DAT **200** was successful, the DAC **400** will verify that the DAT **200** is ready to transmit in step **508**. If the DAT **200** is not ready to transmit, the DAC **400** will record the error condition in the session summary report and will report the error to the DPC **600** in step **522**.

If the DAT **200** is ready to transmit in step **508**, the DAT **200** will transmit a TECBI packet header to the DAC **400** in step **510**. The DAC **400** will determine whether the transmission of the TECBI packet header was successful in step **512**. If the transmission of the TECBI packet header was unsuccessful, the DAC **400** will record the error condition in the session summary report and will report the error to the DPC **600** in step **522**.

If the transmission of the TECBI packet header was successful in step **512**, the DAT **200** will transmit a TECBI packet to the DAC **400** in step **514**. The DAC **400** will determine whether the transmission of the TECBI packet was successful in step **516**. If the transmission of the TECBI packet header was unsuccessful, the DAC **400** will record the error condition in the session summary report and will report the error to the DPC **600** in step **522**.

If the transmission of the TECBI packet was successful in step **516**, the DAC **400**, in step **518**, will compare the TECBI packet header transmitted in step **510** to the TECBI packet transmitted in step **514**. If the TECBI packet header does not match the TECBI packet, the DAC **400** will record the error condition in the session summary report and will report the error to the DPC **600** in step **522**.

If the TECBI packet header matched the TECBI packet in step **518**, the DAC **400** will set the status of the TECBI packet to indicate that it is ready for transmission to the DPC **600** in step **520**. The DAC **400** will also transmit the status to the DAT **200** to indicate successful completion of the polling and transmission session in step **520**. Next, the DAC **400** will determine whether TECBIs have been transmitted from all of the DATs **200** in its region in step **524**. If all DATs **200** in the DAC's **400** region have transmitted TECBIs to the DAC **400**, the DAC **400** will compile a DAT **200** status report in step **528** before terminating the session.

If one or more DATs **200** in the DAC's **400** region have not transmitted TECBIs to the DAC **400**, the DAC **400** will get the address of the next DAT **200** in the region in step **526**. Next, control returns to step **504** where the next DAT **200** in the DAC's **400** region will be polled as previously discussed.

In the preferred embodiment, the DAC server **402** initiates the polling and data transmission at optimum toll rate times to decrease the cost of data transmission. In addition to the raid drives and redundant servers, the DAC **400** will also have dual tape backup units which will periodically backup the entire data set. If there is a catastrophic failure of the DAC **400**, the tapes can be retrieved and sent directly to the DPC **600** for processing. As the DAT **200** polling and data transmission progresses, the DAC **400** will periodically update the DPC **600** with its status. If there is a catastrophic failure with the DAC **400**, the DPC **600** would know how much polling and backup has been done by the failing DAC **400**. Accordingly, the DPC **600** can easily assign another DAC **400** to complete the polling and data transmission for the DATs **200** in the failed DAC's **400** region.

FIG. **6** is a block diagram of the DPC **600** architecture. The DPC **600** accumulates, processes and stores images for later retrieval by DataTreasury™ System retrieval customers who have authorization to access relevant information. DataTreasury™ System retrieval customers include credit card merchants, credit card companies, credit information companies and consumers. As shown in FIG. **6** and FIG. **1**, the DPC **600** polls the DACs **400** and receives TECBIs which have accumulated in the DACs **400**.

In the preferred embodiment, the DPC server **602** comprises stand-alone Digital Equipment Corporation (DEC) SMP Alpha 4100 4/566 servers which are connected on a common network running Windows NT. The DEC Alpha servers manage the collection and intermediate storage of images and data which are received from the DACs **400**.

In the preferred embodiment, the DPC server **602** also comprises EMC **3700** SYMMETRIX CUBE Disk Storage Systems, which store the images and data collected and managed by the DEC Alpha servers. Like the DAC **400** architecture, the DPC **600** architecture uses a SYMMETRIX Remote Data Facility (SRDF), available from EMC, to enable multiple, physically separate data centers housing EMC Storage Systems to maintain redundant backups of each other across a Wide Area Network (WAN).

Like the DAC **400** architecture, the DPC **600** architecture uses a WEB based paradigm using an enhanced Domain Name Services (DNS), the Microsoft Component Object Model (DCOM), and Windows NT Application Program Interfaces (APIs) to facilitate communication and load balancing among the servers comprising the DPC server **602** as described above in the discussion of the DAC **400** architecture.

The workstation **604** performs operation control and system monitoring and management of the DPC **600** network. In the preferred embodiment, the workstation **604**, available from Compaq, is an Intel platform workstation running Microsoft Windows NT 4.x. The workstation **604** should be able to run Microsoft Windows NT 5.x when it becomes available. The workstation **604** executes CA Unicenter TNG software to perform network system monitoring and management. The workstation **604** executes SnoBound Imaging software to display and process TECBIs.

The workstation **604** also performs identification verification by comparing signature data retrieved remotely by the DATs **200** with signature data stored at the DPC **600**. In the preferred embodiment, signature verification software, available from Communications Intelligence Corporation of Redwood Shores, Calif. executing on the workstation **604**

performs the identification verification. As is known to persons of ordinary skill in the art, the workstation **604** could execute other software to perform identification verification by comparing biometric data including facial scans, fingerprints, retina scans, iris scans and hand geometry. Thus, the DPC **600** could verify the identity of a person who is making a purchase with a credit card by comparing the biometric data captured remotely with the biometric data stored at the DPC **600**.

As is known to persons of ordinary skill in the art, the DataTreasury™ System **100** could use workstations with central processing units from other integrated circuit vendors as long as the chosen workstation has the ability to perform standard operations such as fetching instructions, fetching data, executing the fetched instructions with the fetched data and storing results. Similarly, the DataTreasury™ System **100** could use alternate windows operating systems and network monitoring software as long as the selected software can monitor the status of the workstations and links in the network and display the determined status to the operator.

The Remote Data Entry Gateway **614** and the Remote Offsite Data Entry Facilities **616** correct errors which occurred during data capture by the DAI **200**. Since the DataTreasury™ System **100** partitions the document as described in the discussion of the sample receipt of FIG. **3***b*, the operator at the Remote Data Entry Gateway **614** or the Remote Offsite Date Entry Facilities **616** only needs to correct the portion of the document or image snippet which contained the error.

Partitioning improves system performance, decreases system cost and improves system quality. With partitioning, the DPC Server **602** only sends the portion of the document containing the error to the Remote Data Entry Gateway **614** or the Remote Offsite Data Entry Facilities **616**. Since the operator at these data entry locations only sees the portion of the document which contained the error, she can quickly recognize and correct the error. Without partitioning, the operator would have to search for the error in the entire document. With this inefficient process, the operator would need more time and would be more likely to make a mistake by missing the error or making a modification in the wrong location. Accordingly, partitioning improves system performance and quality by increasing the speed and accuracy of the error correction process.

Similarly, partitioning decreases the traffic on the DPC LAN **606** and the Telco Carrier Cloud **412** because the DPC Server **602** only sends the image snippet containing the error to the Remote Offsite Data Entry Facility **616** or the Remote Data Entry Gateway **614**. Accordingly, partitioning decreases system cost by reducing the bandwidth requirement on the interconnection networks.

A DPC LAN **606** facilitates communication among the devices which are connected to the LAN **606** including the DPC server **602** and the network workstation **604**. In the preferred embodiment, the DPC LAN **606** uses a switched 100BaseT/10BaseT communication hardware layer protocol like the DAC LAN **406** discussed earlier. In the preferred embodiment, the DPC LAN **406** is a high speed OC2 network topology backbone supporting TCP/IP. The CISCO Catalyst 5500 Network Switch supports the DPC LAN **606** connectivity among the devices connected to the LAN **606**.

As is known to persons of ordinary skill in the art, alternate LAN architectures could be used to facilitate communication among the devices of the LAN **406**. For example, the LAN **406** could use a hub architecture with a round robin allocation algorithm, a time division multiplexing algorithm or a statistical multiplexing algorithm.

A Wide Area Network (WAN) router **612** connects the DPC LAN **606** to the WAN to facilitate communication between the DACs **400** and the DPCs **600**. In the preferred embodiment, the WAN router **612** is a CISCO 7507 WAN Router. The WAN router **612** uses frame relay connectivity to connect the DPC LAN **612** to the WAN. As is known to persons of ordinary skill in the art, alternate devices, such as the NORTEL Magellen Passport "50" Telecommunication Switch, could be used to facilitate communication between the DACs **400** and the DPCs **600** as long as the selected router meets the performance and quality communication requirements of the system

The DPC **600** has a three tier storage architecture to support the massive storage requirement on the DataTreasury™ System **100**. In the preferred embodiment, the storage architecture consists of Fiber Channel RAID technology based EMC Symmetrix Enterprise Storage Systems where individual cabinets support over 1 Terabyte of storage. After TECBI images have been processed and have been on-line for 30 days, they will be moved to DVD based jukebox systems. After the TECBI images have been on-line for 90 days, they will be moved to Write Once Read Many (WORM) based jukebox systems **608** for longer term storage of up to 3 years in accordance with customer requirements.

In an alternate embodiment, the DPC **600** is intended to also configure a High Density Read Only Memory (HD-ROM) when it becomes available from NORSAM Technologies, Los Alamos, N. Mex., into optical storage jukebox systems **610**, such as that which is available from Hewlett Packard, to replace the DVD components for increased storage capacity. The HD-ROM conforms to CD-ROM form factor metallic WORM disc. The HD-ROM currently has a very large storage capacity of over 320 giga bytes (320 GB) on a single platter and has an anticipated capacity of several terabytes (TB) on a single platter. The DPC **600** uses IBM and Philips technology to read from the HD-ROM and to write to the HD-ROM.

The DPC Alpha servers of the DPC server **602** insert images and data received from the DACs **400** into a single database which is stored on the Digital Storage Works Systems using a data manipulation language as is well known to persons of ordinary skill in the art. In the preferred embodiment, the database is the V8.0 Oracle relational database which was designed to support both data and image storage within a single repository.

As known to persons of ordinary skill in the art, a relational database consists of a collection of tables which have a unique name. See, e.g., Chapter Three of Database System Concepts by Korth and Silberschatz. A database schema is the logical design of the database. Each table in a relational database has attributes. A row in a table represents a relationship among a set of values for the attributes in the table. Each table has one or more superkeys. A superkey is a set of one or more attributes which uniquely identify a row in the table. A candidate key is a superkey for which no proper subset is also a superkey. A primary key is a candidate key selected by the database designer as the means to identify a row in a table.

As is well known to persons of ordinary skill in the art, the DataTreasury™ System **100** could use other database models available from other vendors including the entity relationship model as long as the selected database meets the storage and access efficiency requirements of the system. See, e.g., Chapter 2 of Database System Concepts by Korth and Silberschatz.

An exemplary DPC **600** basic schema consists of the tables listed below. Since the names of the attributes are

descriptive, they adequately define the attributes' contents. The primary keys in each table are identified with two asterisks (**). Numeric attributes which are unique for a particular value of a primary key are denoted with the suffix, "NO". Numeric attributes which are unique within the entire relational database are denoted with the suffix, "NUM".

I. CUSTOMER: This table describes the DataTreasury™ System customer.
- A. **CUSTOMER_ID
- B. COMPANY_NAME
- C. CONTACT
- D. CONTACT_TITLE
- E. ADDR1
- F. ADDR2
- G. CITY
- H. STATE_CODE
- I. ZIP_CODE
- J. COUNTRY_CODE
- K. VOX_PHONE
- L. FAX_PHONE
- M. CREATE_DATE

II. CUSTOMER_MAIL_TO: This table describes the mailing address of the DataTreasury™ System customer.
- A. **MAIL_TO_NO
- B. **CUST_ID
- C. CUSTOMER_NAME
- D. CONTACT
- E. CONTACT_TILE
- F. ADDR1
- G. ADDR2
- H. CITY
- I. STATE_CODE
- J. ZIP_CODE
- K. COUNTRY_CODE
- L. VOX_PHONE
- M. FAX_PHONE
- N. CREATE_DATE
- O. COMMENTS

III. CUSTOMER_DAT_SITE: This table describes the DAT location of the DataTreasury™ System customer.
- A. **DAT_SITE_NO
- B. **CUST_ID
- C. CUSTOMER_NAME
- D. CONTACT
- E. CONTACT_TILE
- F. ADDR1
- G. ADDR2
- H. CITY
- I. STATE_CODE
- J. ZIP_CODE
- K. COUNTRY_CODE
- L. VOX_PHONE
- M. FAX_PHONE
- N. CREATE_DATE
- O. COMMENTS

IV. CUSTOMER_SITE_DAT: This table describes the DAT site(s) of the DataTreasury™ System customer.
- A. **DAT_TERMINAL_ID
- B. **DAT_SITE_NO
- C. **CUST_ID
- D. INSTALL_DATE
- E. LAST_SERVICE_DATE
- F. CREATE_DATE
- G. COMMENTS

V. DATA_SPEC: This table provides data specifications for document partitioning and extraction.
- A. **DATA_SPEC_ID
- B. **CUST_ID
- C. DESCR
- D. RECORD_LAYOUT_RULES
- E. CREATE_DATE
- F. COMMENTS

VI. DATA_SPEC_FIELD: This table provides field data specifications for document partitioning and extraction.
- A. **DATA_SPEC_NO
- B. **DATA_SPEC_ID
- C. FIELD_NAME
- D. DESCR
- E. DATA_TYPE
- F. VALUE_MAX
- G. VALUE_MIN
- H. START_POS
- I. END_POS
- J. FIELD_LENGTH
- K. RULES
- L. CREATE_DATE
- M. COMMENTS

VII. TEMPL_DOC: This table specifies the partitioning of a predefined document.
- A. **TEMPL_DOC_NUM
- B. DATA_SPEC_ID
- C. DESCR
- D. RULES
- E. CREATE_DATE
- F. COMMENTS

VIII. TEMPL_FORM: This table defines the location of forms on a predefined document.
- A. **TEMPL_FORM_NO
- B. **TEMPL_DOC_NUM
- C. SIDES_PER_FORM
- D. MASTER_IMAGE_SIDE_A
- E. MASTER_IMAGE_SIDE_B
- F. DISPLAY_ROTATION_A
- G. DISPLAY_ROTATION_B
- H. DESCR
- I. RULES
- J. CREATE_DATE

IX. TEMPL_PANEL: This table specifies the location of panels within the forms of a predefined document.
- A. **TEMPL_PANEL_NO
- B. **TEMPL_SIDE_NO
- C. **TEMPL_FORM_NO
- D. **TEMPL_DOC_NUM
- E. DISPLAY_ROTATION
- F. PANEL_UL_X
- G. PANEL_UL_Y
- H. PANEL_LR_X

I. PANEL_LR_Y

J. DESCR

K. RULES

L. CREATE_DATE

X. TEMPL_FIELD: This table defines the location of fields within the panels of a form of a predefined document.

A. **TEMPL_FIELD_NO

B. **TEMPL_PANEL_NO

C. **TEMPL_SIDE_NO

D. **TEMPL_FORM_NO

E. **TEMPL_DOC_NUM

F. DISPLAY_ROTATION

G. FLD_UL_X

H. FLD_UL_Y

I. FLD_LR_X

J. FLD_LR_Y

K. DESCR

L. RULES

M. CREATE_DATE

XI. DAT_BATCH: This table defines batches of documents which were processed during a DAT session.

A. **DAT_BATCH_NO

B. **DAT_SESSION_NO

C. **DAT_SESSION_DATE

D. **DAT_TERMINAL_ID

E. DAT_UNIT_CNT

F. CREATE_DATE

XII. DAT_UNIT: This table defines the unit in a batch of documents which were processed in a DAT session.

A. **DAT_UNIT_NUM

B. **DAT_BATCH_NO

C. **DAT_SESSION_NO

D. **DAT_SESSION_DATE

E. **DAT_TERMINAL_ID

F. FORM_CNT

G. DOC_CNT

H. CREATE_DATE

XIII. DAT_DOC: This table defines documents in the unit of documents which were processed in a DAT session.

A. **DAT_DOC_NO

B. **DAT_UNIT_NUM

C. DOC_RECORD_DATA

D. CREATE_DATE

The DATA_SPEC, DATA_SPEC_FIELD, TEMPL_DOC, TEMPL_FORM, TEMPL_PANEL and TEMPL_FIELD tables implement the document partitioning algorithm mentioned above in the discussion of the sample receipt of FIG. **3***b*. The cross product of the DATA_SPEC and DATA_SPEC_FIELD tables partition arbitrary documents while the cross product of the TEMPL_DOC, TEMPL_FORM, TEMPL_PANEL and TEMPL_FIELD tables partition predefined documents of the DataTreasury™ System **100**. The TEMPL-FORM defines the location of forms on a predefined document. The TEMPL-PANEL defines the location of panels within the forms of a predefined document. Finally, the TEMPL_FIELD table defines the location of fields within the panels of a form of a predefined document.

The DPC **600** performs data mining and report generation for a wide variety of applications by returning information from the data base. For example, the DPC **600** generates market trend analysis reports and inventory reports for merchants by analyzing the data from receipts captured by the DAT **200**. The DPC **600** also can provide important tax information to the taxpayer in the form of a report or to software applications like tax preparation software by retrieving tax information from the database which originally resided on receipts, documents and electronic transactions captured by the DAT **200**. Similarly, the DPC **600** can also provide tax information for particular periods of time for a tax audit.

FIG. **7** is a flow chart **700** describing the polling of the DACs **300** by a DPC **600** and the transmission of the TECBIs from the DACs **300** to the DPC **600**. In step **702**, the DPC **600** reads the address of the first DAC **300** in its region for polling. In step **704**, the DPC **600** connects with a DAC **300** for transmission. The DPC **600** determines whether the connection to the DAC **300** was successful in step **706**. If the call to the DAC **300** was unsuccessful, the DPC **600** will record the error condition in the session summary report and will report the error to the DPC **600** manager in step **722**.

If the connection to the DAC **300** was successful, the DPC **600** will verify that the DAC **300** is ready to transmit in step **708**. If the DAC **300** is not ready to transmit, the DPC **600** will record the error condition in the session summary report and will report the error to the DPC **600** manager in step **722**.

If the DAC **300** is ready to transmit in step **708**, the DAC **300** will transmit a TECBI packet header to the DPC **600** in step **710**. The DPC **600** will determine whether the transmission of the TECBI packet header was successful in step **712**. If the transmission of the TECBI packet header was unsuccessful, the DPC **600** will record the error condition in the session summary report and will report the error to the DPC **600** manager in step **722**.

If the transmission of the TECBI packet header was successful in step **712**, the DAC **300** will transmit a TECBI packet to the DPC **600** in step **714**. The DPC **600** will determine whether the transmission of the TECBI packet was successful in step **716**. If the transmission of the TECBI packet header was unsuccessful, the DPC **600** will record the error condition in the session summary report and will report the error to the DPC **600** manager in step **722**.

If the transmission of the TECBI packet was successful in step **716**, the DPC **600**, in step **718**, will compare the TECBI packet header transmitted in step **710** to the TECBI packet transmitted in step **714**. If the TECBI packet header does not match the TECBI packet, the DPC **600** will record the error condition in the session summary report and will report the error to the DPC **600** manager in step **722**.

If the TECBI packet header matched the TECBI packet in step **718**, the DPC **600** will set the status of the TECBI packet to indicate that it was received at the DPC **600** in step **720**. The DPC **600** will also transmit the status to the DAC **300** to indicate successful completion of the polling and transmission session in step **720**. Next, the DPC **600** will determine whether TECBIs have been transmitted from all of the DACs **300** in its region in step **724**. If all DACs **300** in the DPC's **600** region have transmitted TECBIs to the DPC **600**, the DPC **600** will compile a DAC **300** status report in step **728** before terminating the session.

If one or more DACs **300** in the DPC's **600** region have not transmitted TECBIs to the DPC **600**, the DPC **600** will get the address of the next DAC **300** in the region in step **726**. Next, control returns to step **704** where the next DAC **300** in the DPC's **600** region will be polled as previously discussed.

FIG. **8** is a flow chart **800** describing the data processing performed by the DPC **600**. In step **802**, the DPC **600** fetches

the first TECBI packet. Next, the DPC **600** extracts the first TECBI from the TECBI packet in step **804**. In step **806**, the DPC **600** inserts the TECBI into the database. In step **808**, the DPC **600** extracts the tag header which includes the customer identifier, the encryption keys and the template identifier from the TECBI to obtain the ECBI.

In step **810**, the DPC **600** decrypts the ECBI image to obtain the CBI. In step **812**, the DPC **600** uncompresses the CBI to obtain the BI. In step **814**, the DPC **600** fetches and applies the BI template against the BI. Further the DPC **600** divides the BI into image snippets and tags the BI template with data capture rules in step **814** to form the Tagged Bitmap Image Snippets (TBIS). In step **816**, the DPC **600** submits the TBISs for data capture operations to form the IS Derived Data Record (ISDATA). The DPC **600** discards the TBISs upon completion of the data capture operations in step **816**. In step **818**, the DPC **600** updates the TECBI record in the database with the IS Derived Data.

In step **820**, the DPC **600** determines whether it has processed the last TECBI in the TECBI packet. If the last TECBI in the TECBI packet has not been processed, the DPC **600** extracts the next TECBI from the TECBI packet in step **822**. Next, control returns to step **806** where the next TECBI will be processed as described above.

If the last TECBI in the TECBI packet has been processed, the DPC **600** determines whether the last TECBI packet has been processed in step **824**. If the last TECBI packet has not been processed, the DPC **600** fetches the next TECBI packet in step **826**. Next, control returns to step **804** where the next TECBI packet will be processed as described above. If the last TECBI packet has been processed in step **824**, the DPC **600** terminates data processing.

As is known to persons of ordinary skill in the art, a user can request information from a relational database using a query language. See, e.g., Chapter Three of Database System Concepts by Korth and Silberschatz. For example, a user can retrieve all rows of a database table having a primary key with particular values by specifying the desired primary key's values and the table name on a select operation. Similarly, a user can retrieve all rows from multiple database tables having primary keys with particular values by specifying the desired primary keys' values and the tables with a select operation.

The DataTreasury™ System provides a simplified interface to its retrieval customers to enable data extraction from its relational database as described in FIG. **9**. For example, a DataTreasury™ System customer can retrieve the time, date, location and amount of a specified transaction.

The DPC **600** performs data mining and report generation for a wide variety of applications by returning information from the data base. For example, the DPC **600** generates market trend analysis reports and inventory reports for merchants by analyzing the data from receipts captured by the DAT **200**. The DPC **600** also can provide important tax information to the taxpayer in the form of a report or to tax preparation software by retrieving tax information from the database which originally resided on receipts, documents and electronic transactions captured by the DAT **200**. Similarly, the DPC **600** can also provide tax information for particular periods of time for a tax audit.

FIG. **9** is a flowchart **900** describing the data retrieval performed by the DPC **600**. In step **902**, the DPC **600** receives a TECBI retrieval request. In step **904**, the DPC **600** obtains the customer identifier. In step **906**, the DPC **600** determines whether the customer identifier is valid. If the customer identifier is not valid, control returns to step **904** where the DPC **600** will obtain another customer identifier.

If the customer identifier is valid in step **906**, the DPC **600** will obtain the customer security profile in step **908**. In step **910**, the DPC **600** receives a customer retrieval request. In step **912**, the DPC **600** determines whether the customer retrieval request is consistent with the customer security profile. If the customer retrieval request is not consistent with the customer security profile, control returns to step **910** where the DPC **600** will obtain another customer retrieval request. If the customer retrieval request is consistent with the customer security profile, the DPC **600** will transmit the results to the customer as indicated by the customer security profile in step **914**.

While the above invention has been described with reference to certain preferred embodiments, the scope of the present invention is not limited to these embodiments. One skilled in the art may find variations of these preferred embodiments which, nevertheless, fall within the spirit of the present invention, whose scope is defined by the claims set forth below.

What is claimed is:

1. A system for central management, storage and report generation of remotely captured paper transactions from documents and receipts comprising:

one or more remote data access subsystems for capturing and sending paper transaction data and subsystem identification information comprising at least one imaging subsystem for capturing the documents and receipts and at least one data access controller for managing the capturing and sending of the transaction data;

at least one central data processing subsystem for processing, sending, verifying and storing the paper transaction data and the subsystem identification information comprising a management subsystem for managing the processing, sending and storing of the of the transaction data; and

at least one communication network for the transmission of the transaction data within and between said one or more data access subsystems and said at least one data processing subsystem, with the data access subsystem providing encrypted subsystem identification information and encrypted paper transaction data to the data processing subsystem.

2. A system as in claim **1** wherein said one or more data access subsystems further comprise at least one scanner for capturing the paper transaction data.

3. A system as in claim **2** wherein said one or more data access subsystems also capture electronic transactions from credit cards, smart cards and debit cards, signature data or biometric data, further comprising:

at least one card interface for capturing the electronic transaction data;

at least one signature interface for capturing an electronic signature; and

at least one biometric interface for capturing biometric data.

4. A system as in claim **3** wherein said at least one data access controller successively transforms the captured transaction data to a bitmap image, a compressed bitmap image, an encrypted, compressed bitmap image and an encrypted, compressed bitmap image tagged with information identifying a location and time of the transaction data capture.

5. A system as in claim **4** wherein said one or more data access subsystems further comprise digital storage for storing the tagged, encrypted, compressed bitmap image.

6. A system as in claim **5** wherein said at least one card interface initiates the electronic transaction.

7. A system as in claim 6 wherein said one or more data access subsystems further comprise at least one printer for printing the paper transaction initiated by said at least one card interface.

8. A system as in claim 7 wherein the paper transaction printed by said at least one printer includes data glyphs.

9. A system as in claim 1 wherein said data management subsystem of said at least one data processing subsystem comprises:

at least one server for polling said one or more remote data access subsystems for transaction data;

a database subsystem for storing the transaction data in a useful form;

a report generator for generating reports from the transaction data and providing data to software applications;

at least one central processing unit for managing the storing of the transaction data;

a domain name services program for dynamically assigning one of said at least one server to receive portions of the transaction data for balancing the transaction data among said at least one server; and

a memory hierarchy.

10. A system as in claim 9 wherein said at least one server also polls for biometric and signature data, said database stores the biometric data and the signature data, and said at least one central processing unit verifies the biometric data and the signature data.

11. A system as in claim 9 wherein said memory hierarchy comprises at least one primary memory for storage of recently accessed transaction data and at least one secondary memory for storage of other transaction data.

12. A system as in claim 11 wherein said at least one secondary memory comprises at least one write once read many jukebox and at least one optical storage jukebox.

13. A system as in claim 12 wherein said at least one optical storage jukebox comprises read only memory technology including compact disc read only memory form factor metallic write once read many disc.

14. A system as in claim 9 wherein said database subsystem comprises at least one predefined template for partitioning the stored transaction data into panels and identifying locations of the panels.

15. A system as in claim 14 wherein said data processing subsystem further comprises a data entry gateway for correcting errors in the panels of stored transaction data.

16. A system as in claim 1 wherein said at least one communication network comprises:

at least one first local area network for transmitting data within a corresponding one of said one or more remote data access subsystems;

at least one second local area network for transmitting data within a corresponding one of said at least one data processing subsystem; and

at least one wide area network for transmitting data between said one or more remote data access subsystems and said at least one data processing subsystem.

17. A system as in claim 16 wherein said at least one communication network further comprises:

at least one modem for connecting said at least one first local area network of said one or more data access subsystems to a corresponding one of said at least one second local area network of said at least one data processing subsystem through said at least one wide area network; and

at least one bank of modems for connecting said at least one second local area network of said at least one data processing subsystem to a corresponding some of said at least one first local area network of said one or more data access subsystems through said at least one wide area network.

18. A system as in claim 1 further comprising at least one data collecting subsystem for collecting and sending the electronic or paper transaction data comprising a further management subsystem for managing the collecting and sending of the transaction data.

19. A system as in claim 18 wherein said further data management subsystem of said at least one data collecting subsystem comprises:

at least one server for polling said one or more remote data access subsystems for transaction data;

a database for storing the transaction data in a useful form;

at least one central processing unit for managing the collecting of the transaction data;

a domain name services program for dynamically assigning one of said at least one server to receive portions of the transaction data for balancing the transaction data among said at least one server; and

a memory hierarchy.

20. A system as in claim 19 wherein said memory hierarchy comprises at least one primary memory for collecting transaction data and at least one secondary memory for backup storage of the transaction data.

21. A system as in claim 20 wherein said at least one secondary memory comprises at least one DLT jukebox.

22. A system as in claim 18 wherein said at least one communication network comprises:

at least one first local area network for transmitting data within a corresponding one of said one or more remote data access subsystems;

at least one second local area network for transmitting data within a corresponding one of said at least one data collection subsystem;

at least one third local area network for transmitting data within a corresponding one of said at least one data processing subsystem; and

at least one wide area network for transmitting data between said one or more remote data access subsystems, said at least one data collection subsystem and said at least one data processing subsystem.

23. A system as in claim 22 wherein said at least one communication network further comprises:

at least one first modem for connecting said at least one first local area network of said one or more data access subsystems to a corresponding one of said at least one second local area network through said at least one wide area network;

at least one bank of modems for connecting said at least one second local area network of said at least one data collection subsystem to a corresponding some of said at least one first local area network of said one or more data access subsystems through said at least one wide area network;

at least one first wide area network router for connecting a corresponding one of said at least one second local area network of said at least one data collecting subsystem to said at least one wide area network; and

at least one second wide area network router for connecting a corresponding one of said at least one third local area network of said at least one data processing subsystem to said at least one wide area network.

24. A system as in claim 23 wherein said at least one first wide area network and said at least one second wide area network comprises a carrier cloud, said carrier cloud using a frame relay method for transmitting the transaction data.

25. A system as in claim 22 wherein said at least one second local area network and said at least one third local area network further comprises a corresponding one of at least one network switch for routing transaction data within said at least one second local area network and said at least one third local area network.

26. A method for central management, storage and verification of remotely captured paper transactions from documents and receipts comprising the steps of:

capturing an image of the paper transaction data at one or more remote locations and sending a captured image of the paper transaction data;

managing the capturing and sending of the transaction data;

collecting, processing, sending and storing the transaction data at a central location;

managing the collecting, processing, sending and storing of the transaction data;

encrypting subsystem identification information and the transaction data; and

transmitting the transaction data and the subsystem identification information within and between the remote location(s) and the central location.

27. The method as in claim 26 wherein said managing the capturing and sending step comprises the steps of:

successively transforming the captured transaction data to a bitmap image, a compressed bitmap image, an encrypted, compressed bitmap image and an encrypted, compressed bitmap image tagged with information identifying a location and time of the transaction data capturing; and

storing the tagged, encrypted, compressed bitmap image.

28. The method as in claim 27 wherein said managing the capturing and sending step also captures electronic transactions from credit cards, smart cards and debit cards, signature data or biometric data, further comprising the steps of:

initiating an electronic transaction;

capturing signature data;

capturing biometric data; and

printing a paper transaction with data glyphs for the initiated electronic transaction.

29. A method as in claim 26 wherein:

said capturing and sending step occurs at a plurality of remote locations; and

said collecting, processing, sending and storing step occurs at a plurality of central locations.

30. A method as in claim 29 wherein said collecting, processing, sending and storing step comprises the steps of:

polling the remote locations for transaction data with servers at the central locations;

storing the transaction data at the central location in a memory hierarchy, said storing maintains recently accessed transaction data in a primary memory and other transaction data in a secondary memory; and

dynamically assigning the servers at the central location to receive portions of the transaction data for balancing the transaction data among the servers; and

generating reports from the transaction data and providing data to software applications.

31. A method as in claim 30 wherein said storing the transaction data step comprises the steps of:

partitioning the stored transaction data with predefined templates into panels; and

identifying locations of the panels.

32. A method as in claim 31 wherein said managing the collecting, processing, sending and storing of the transaction data step comprises correcting errors in the panels of stored transaction data.

33. A method as in claim 32 further comprising the steps of:

polling the remote locations for captured electronic data, captured signature data and captured biometric data with servers at the central locations; and

comparing the captured signature data and the captured biometric data to stored signature data and stored biometric data respectively for identification verification.

34. A method as in claim 32 wherein said transmitting the transaction data step comprises the steps of:

transmitting data within the remote locations;

transmitting data from each remote location to a corresponding central location; and

transmitting data within the central locations.

35. A method as in claim 34 wherein said transmitting data from each remote location to a corresponding central location step comprises the steps of:

connecting each remote location to a corresponding central location; and

connecting each central location to corresponding remote locations.

36. A method as in claim 29 further comprising the steps of:

collecting and sending the electronic or paper transaction data at intermediate locations;

managing the collecting and sending of the transaction data; and

transmitting the transaction data within the intermediate location and between the intermediate locations and the remote locations and the central locations.

37. A method as in claim 36 wherein said managing the collecting and sending step comprises the steps of:

polling the remote locations for transaction data with servers in the intermediate locations;

storing the transaction data in the intermediate locations in a useful form, said storing maintains the transaction data in a primary memory of a memory hierarchy and performs backup storage of the transaction data into a secondary memory of the memory hierarchy; and

dynamically assigning the servers to receive portions of the transaction data for balancing the transaction data among the servers.

38. The method as in claim 36 wherein said transmitting the transaction data step comprises the steps of:

transmitting data within the remote locations;

transmitting data from each remote location to a corresponding intermediate location;

transmitting data within the intermediate locations;

transmitting data from each intermediate location to corresponding central locations; and

transmitting data within the central locations.

39. A method as in claim 38 wherein said transmitting data from each remote location to corresponding intermediate locations step comprises the steps of:

connecting each remote location to a corresponding intermediate location; and

connecting the intermediate locations to corresponding remote locations.

40. A method as in claim **38** wherein said transmitting data from each intermediate location to corresponding central locations comprises the steps of:

connecting each intermediate location to an external communication network; and

connecting the corresponding central locations to the communication network.

41. A method as in claim **40** wherein said transmitting data from each intermediate location to corresponding central locations step further comprises the steps of:

packaging the transaction data into frames; and

transmitting the frames through the external communication network.

42. A communication network for the transmission of data within and between one or more remote data processing subsystems, at least one intermediate data collecting subsystem and at least one central subsystem forming a tiered architecture wherein each of said at least one central data processing subsystem communicate with a corresponding some of said at least one data collecting subsystem and each of said at least one data collecting subsystem communicate with a corresponding some of said one or more data processing subsystems, said data processing subsystem including an imaging subsystem for capturing images of documents and receipts, comprising:

at least one first local area network for transmitting data within a corresponding one of said one or more remote subsystems;

at least one second local area network for transmitting data within a corresponding one of said at least one intermediate subsystem;

at least one third local area network for transmitting data within a corresponding one of said at least one central subsystem; and

at least one wide area network for transmitting data between said one or more remote subsystems, said at least one intermediate subsystem and said at least one central subsystem.

43. A communication network as in claim **42** further comprising:

at least one first modem for connecting said at least one first local area network of said one or more remote subsystems to a corresponding one of said at least one second local area network through said at least one wide area network;

at least one bank of modems for connecting said at least one second local area network of said at least one intermediate subsystem to a corresponding some of said at least one first local area network of said one or more remote subsystems through said at least one wide area network;

at least one first wide area network router for connecting a corresponding one of said at least one second local area network of said at least one intermediate subsystem to said at least one wide area network; and

at least one second wide area network router for connecting a corresponding one of said at least one third local area network of said at least one central subsystem to said at least one wide area network.

44. A system as in claim **43** wherein said at least one first wide area network and said at least one second wide area network comprises a carrier cloud which utilizes a frame relay method for transmitting the transaction data.

45. A system as in claim **44** wherein said at least one second local area network and said at least one third local area network further comprises a corresponding one of at least one network switch for routing transaction data within said at least one second local area network and said at least one third local area network; and further wherein said data comprises (a) electronic transactions from credit cards, smart cards and debit cards, signature data or biometric data, or (b) paper transactions from documents and receipts.

46. A method for transmitting data within and between one or more remote subsystems, at least one intermediate subsystem and at least one central subsystem in a tiered manner wherein each of the central subsystems communicate with at least one intermediate subsystem and each of the intermediate subsystems communicate with at least one remote subsystems comprising the steps of:

capturing an image of documents and receipts and extracting data therefrom;

transmitting data within the remote locations;

transmitting data from each remote location to corresponding intermediate location;

transmitting data within the intermediate locations;

transmitting data from each intermediate location to corresponding central locations; and

transmitting data within the central locations.

47. A method as in claim **46** wherein said transmitting data from each remote location to corresponding intermediate locations step comprises the steps of:

connecting each remote location to a corresponding intermediate location; and

connecting the intermediate locations to corresponding remote locations.

48. A method as in claim **47** wherein said transmitting data from each intermediate location to corresponding central locations comprises the steps of:

connecting each intermediate location to an external communication network; and

connecting the corresponding central locations to the external communication network.

49. A method as in claim **48** wherein said transmitting data from each intermediate location to corresponding central locations step further comprises the steps of:

packaging the transaction data into frames; and

transmitting the frames through the external communication network.

50. A method as in claim **46** wherein said data is obtained from (a) electronic transactions from credit cards, smart cards and debit cards, signature data or biometric data, or (b) paper transactions from documents and receipts.

* * * * *

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office

July 08, 2002

THIS IS TO CERTIFY THAT ANNEXED IS A TRUE COPY FROM THE RECORDS OF THIS OFFICE OF THE FILE WRAPPER AND CONTENTS OF:

APPLICATION NUMBER: *08/917,761*
FILING DATE: *August 27, 1997*
PATENT NUMBER: *5,910,988*
ISSUE DATE: *June 08, 1999*

By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS

L. Edelen

L. EDELEN
Certifying Officer

DTC000027

380	24
Class	Subclass

ISSUE CLASSIFICATION

SCANNED 4

5910988

5910988

UTILITY SERIAL NUMBER	PATENT DATE	PATENT NUMBER
	JUN 08 1999	

SERIAL NUMBER	FILING DATE	CLASS	SUBCLASS	GROUP ART UNIT	EXAMINER
			24	2746	Cangialosi

APPLICANTS

grc

grc

CERTIFICATE

OCT 12 1999

OF CORRECTION

SMALL ENTITY

Foreign priority claimed: ☐ yes ☑ no 35 USC 119 conditions met: ☐ yes ☑ no Verified and Acknowledged ____ Examiner's Initials	AS FILED →	STATE OR COUNTRY	SHEETS DRWGS.	TOTAL CLAIMS	INDEP. CLAIMS	FILING FEE RECEIVED	ATTORNEY'S DOCKET NO.

ADDRESS

J. Michael Martinez de Andino, Esq
McGuire, Woods, Battle + Boothe, LLP
One James Center
901 East Cary St.
Richmond, VA 23219-4043

TITLE

U.S. DEPT. OF COMM./PAT. & TM—PTO-436L (Rev. 12-94)

PARTS OF APPLICATION FILED SEPARATELY

Applications Examiner

NOTICE OF ALLOWANCE MAILED: 3-23-99

Assistant Examiner

CLAIMS ALLOWED

Total Claims	Print Claim
50	

ISSUE FEE

Amount Due	Date Paid
605	4-26-99

SALVATORE CANGIALOSI
PRIMARY EXAMINER
ART UNIT 272
Primary Examiner

DRAWING

Sheets Drwg.	Figs. Drwg.	Print Fig.
10	10	3A

ISSUE BATCH NUMBER

Label Area

PREPARED FOR ISSUE

WARNING: The information disclosed herein may be restricted. Unauthorized disclosure may be prohibited by the United States Code Title 35, Sections 122, 181 and 368. Possession outside the U.S. Patent & Trademark Office is restricted to authorized employees and contractors only.

ISSUE FEE IN FILE

Form PTO-436A
(Rev. 8/92)

SCANNED

(FACE)

jc514 U.S. PTO
08/27/97

A/no fee

PENNIE & EDMONDS LLP
COUNSELLORS AT LAW
1667 K Street, N.W.
Washington, D.C. 20006
(202) 496-4400

ATTORNEY DOCKET NO. 2269-003 Date August 27, 1997

Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231

Sir:

The following utility patent application is enclosed for filing:

Applicant(s): Claudio R. BALLARD Executed on: Unexecuted

Title of Invention: **REMOTE IMAGE CAPTURE WITH CENTRALIZED PROCESSING AND STORAGE**

Pages of Specification 56 (Including Abstract) Sheets of Drawings 10

PATENT APPLICATION FEE VALUE

TYPE	NO. FILED	LESS	EXTRA	EXTRA RATE	FEE
Total Claims	50	-20	30	$22.00 each	660.00
Independent	4	-3	1	$80.00 each	80.00
			Minimum Fee		770.00
			Multiple Dependency Fee If Applicable ($260.00)		
			Total		1,510.00
		50% Reduction for Independent Inventor, Nonprofit Organization or Small Business Concern (a verified statement as to the applicant's status is attached)			-
				Total Filing Fee	$ 1,510.00

Respectfully submitted,

[signature] Reg No 35,932 for 20,256
Allan A. Fanucci (Reg. No.)
PENNIE & EDMONDS LLP

Enclosures

08917761.082797

PEDC-98848.1

DTC000029

D 066732